

INSTALACION WEBCENTER CONTENT

FONCEP

Autores:	Oscar Hernán Rojas
Fecha Creación:	Diciembre, 2021
Última Actualización:	
Referencia:	Revisión de plataforma
Versión:	1.1

1 Control del Documento

1.1 Registro de Cambios

Fecha	Autor	Versión	Referencia de cambio
16-12-2021	Hernán Rojas	DRAFT	Creación del documento

1.2 Revisores

Nombre	Cargo	Correo
Jaime Rozo	Senior Principal Technical Account Manager	Jaime.enrique.rozo@oracle.com

1.3 Lista de Distribución

Nombre	Cargo	Correo

1.4 Actas de Reunión Asociadas

N.A.

Contenido

1	Control del Documento.....	2
1.1	Registro de Cambios	2
1.2	Revisores.....	2
1.3	Lista de Distribución	2
1.4	Actas de Reunión Asociadas	2
	Introducción	4
2	INSTALACION BASE DE DATOS	5
	Instalación software Grid Infrastructure.....	5
	Instalación software base de datos y creación base de datos wccinfra	6
3	INSTALACION WEBCENTER CONTENT	8
	Instalación Java:	8
	Instalación Oracle Fusion Middleware Infrastructure:	8
	Instalación Oracle WebCenter Content:	13
	Instalación Oracle SOA Suite:	17
	Instalación Oracle OHS:	21
	Ejecución RCU:	26
	Creación de Dominio WLS:	31
	Consolas de Producto:	44

Introducción


En este documento se entrega como apoyo a la instalación y configuración del Oracle WebCenter Content de FONCEP.

2 INSTALACION BASE DE DATOS

Se realiza instalación de software en versión 19.13 de Grid Infraestructure y de base de datos.

Instalación software Grid Infraestructure

Se realiza la instalación de Grind Infraestructure en versión 19.3 y se actualiza a la versión 19.13, a continuación, se realiza la creación los diskgroups de DATA y de FRA, se anexan los pantallazos correspondientes.

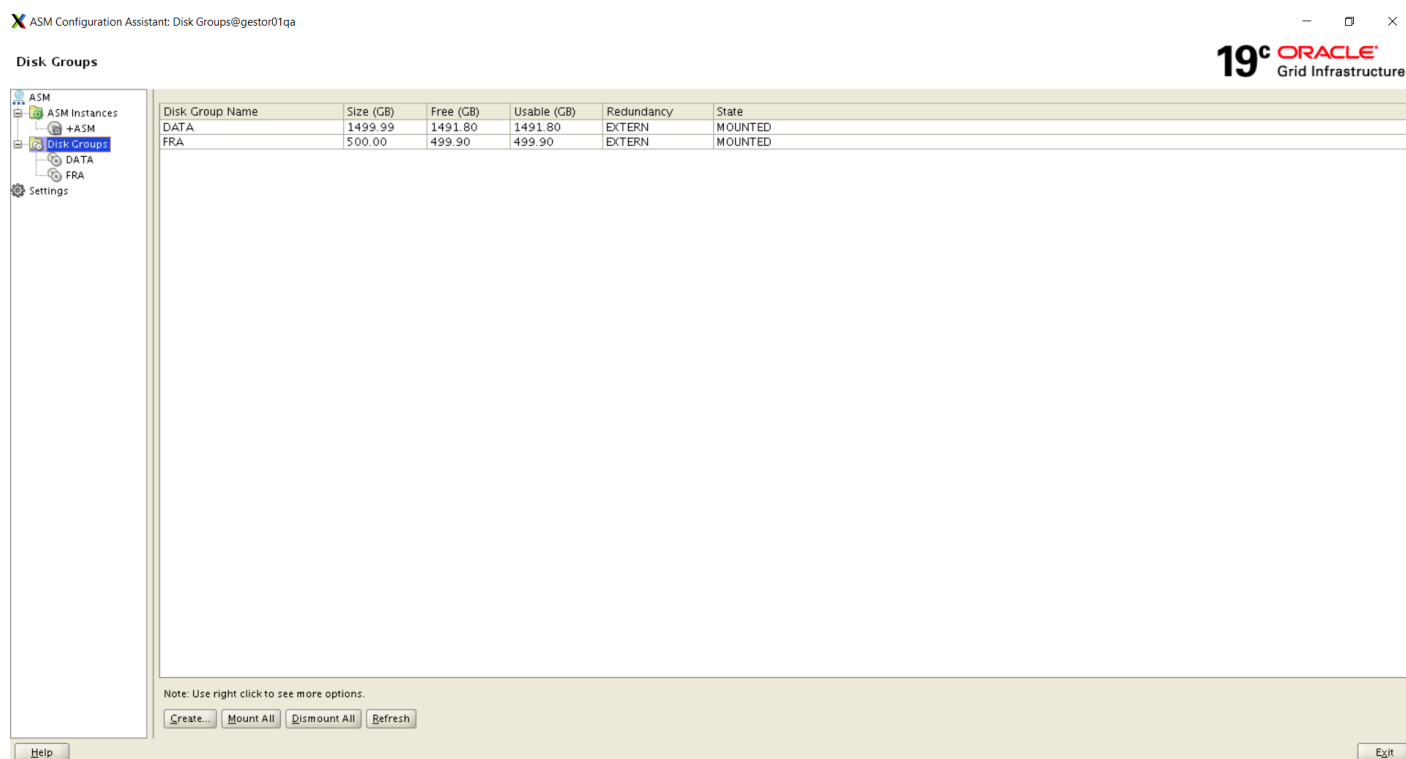

```
[grid@gestor01qa ~]$ id
uid=54322(grid) gid=54321(oinstall) groups=54321(oinstall),54322(dba),54324(backupdba),54325(dgdba),54326(kmdba),54327(asmdba),54328(asmoper),54329(asmadmin),54330(racdba) context=unconfined_u:unconfined_r:unconfined_t:s0-s0:c0.c1023
[grid@gestor01qa ~]$ sqlplus / as sysasm

SQL*Plus: Release 19.0.0.0.0 - Production on Fri Dec 17 15:17:38 2021
Version 19.13.0.0.0

Copyright (c) 1982, 2021, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.13.0.0.0

SQL> show parameters db_unique_name

NAME                                TYPE        VALUE
-----
db_unique_name                      string      +ASM

SQL> SELECT BANNER_FULL
FROM V$VERSION;

BANNER_FULL
-----
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.13.0.0.0

SQL>
```

Instalación software base de datos y creación base de datos wccinfra

Se realiza la instalación del software de base de datos en versión 19.3 y se actualiza a la versión 19.13 y se realiza la creación de la base de datos para el ambiente de Web Center Content

```
[oracle@gestor01qa ~]$ id
uid=54321(oracle) gid=54321(oinstall) groups=54321(oinstall),54322(dba),54323(oper),54324(backupdba),54325(dgdba),54326(kmdba),54327(asmdba),54329(asmadmin),54
330(racdba) context=unconfined_u:unconfined_r:unconfined_t:s0-s0:c0.c1023
[oracle@gestor01qa ~]$ export ORACLE_SID=wccinfra
[oracle@gestor01qa ~]$ sqlplus / as sysdba

SQL*Plus: Release 19.0.0.0.0 - Production on Fri Dec 17 16:39:07 2021
Version 19.13.0.0.0

Copyright (c) 1982, 2021, Oracle. All rights reserved.

Connected to:
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.13.0.0.0

SQL> show parameters db_unique_name

NAME                                TYPE        VALUE
-----
db_unique_name                      string      wccinfra
SQL> select BANNER_FULL
2 from v$version;

BANNER_FULL
-----
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production
Version 19.13.0.0.0

SQL> █
```

Database Configuration Assistant - Configure an existing database - Step 7 of 9@gestor01qa

Summary

- [Database Operation](#)
- [Select Database](#)
- [Database Options](#)
- [Data Vault Option](#)
- [Connection Mode](#)
- [Oracle R Configuration](#)
- Summary**
- Progress Page
- Finish

Database Configuration Assistant

Database New Configuration

- Database Name: wccinfra
- Configure Oracle Database Vault: No
- Configure Oracle Label Security: No
- Configure Oracle Label Security with OID: No
- Configure Oracle R: Yes
- Tablespace for Oracle R configuration: SYSAUX
- Database components

Help

< Back

Next >

Finish

Cancel

3 INSTALACION WEBCENTER CONTENT

A continuación, se presentan las pantallas de instalación del producto Oracle WebCenter Content



Instalación Java:



Se realizo la instalación del componente Oracle JDK version 1.8.0_311 sobre el servidor **gestormdqa**. En la ruta `/u01/oracle/products/jdk`



```
[oracle@gestormdqa products]$ java -version
java version "1.8.0_311"
Java(TM) SE Runtime Environment (build 1.8.0_311-b11)
Java HotSpot(TM) 64-Bit Server VM (build 25.311-b11, mixed mode)
```



Instalación Oracle Fusion Middleware Infrastructure:



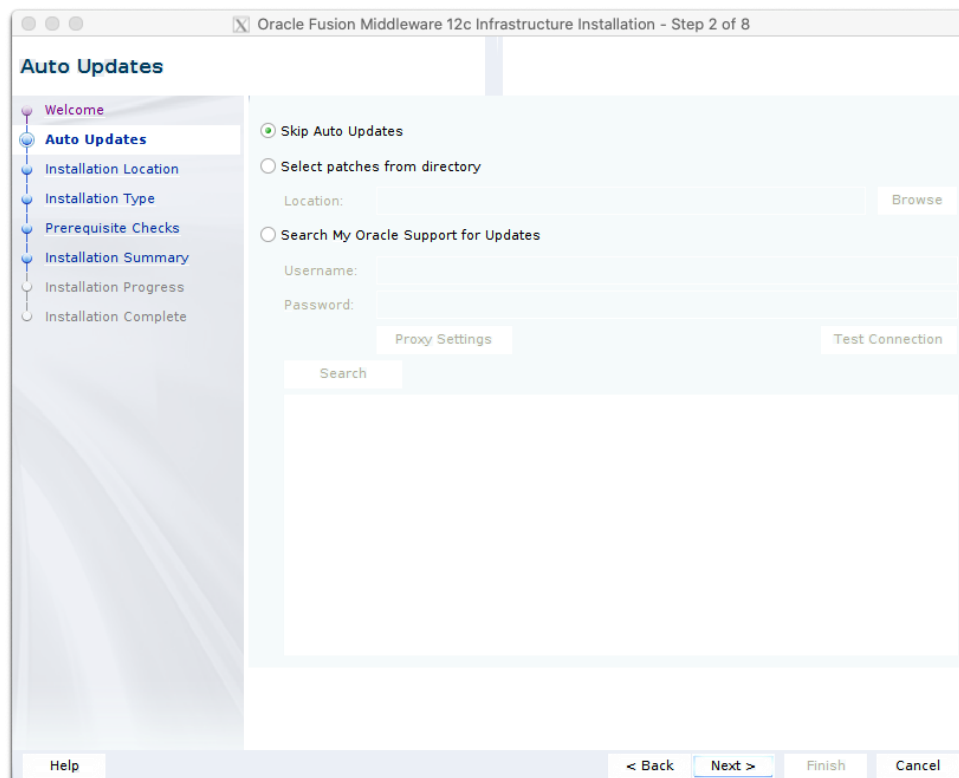
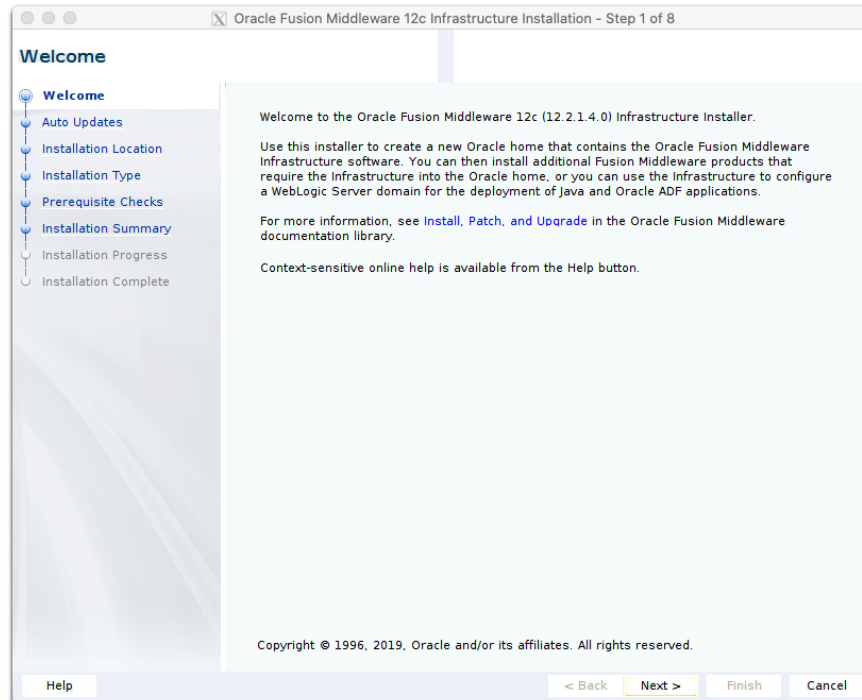


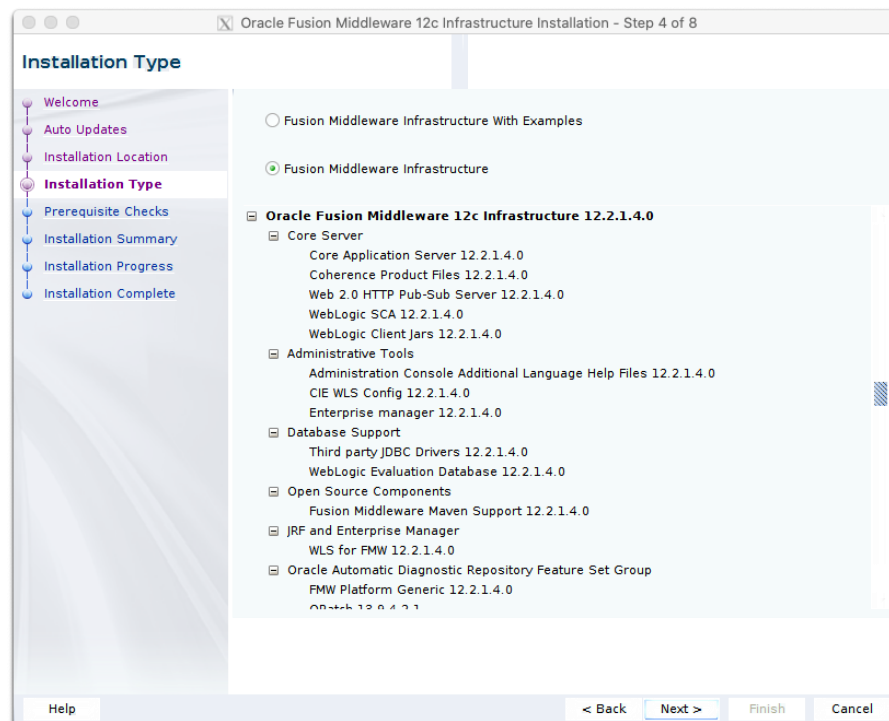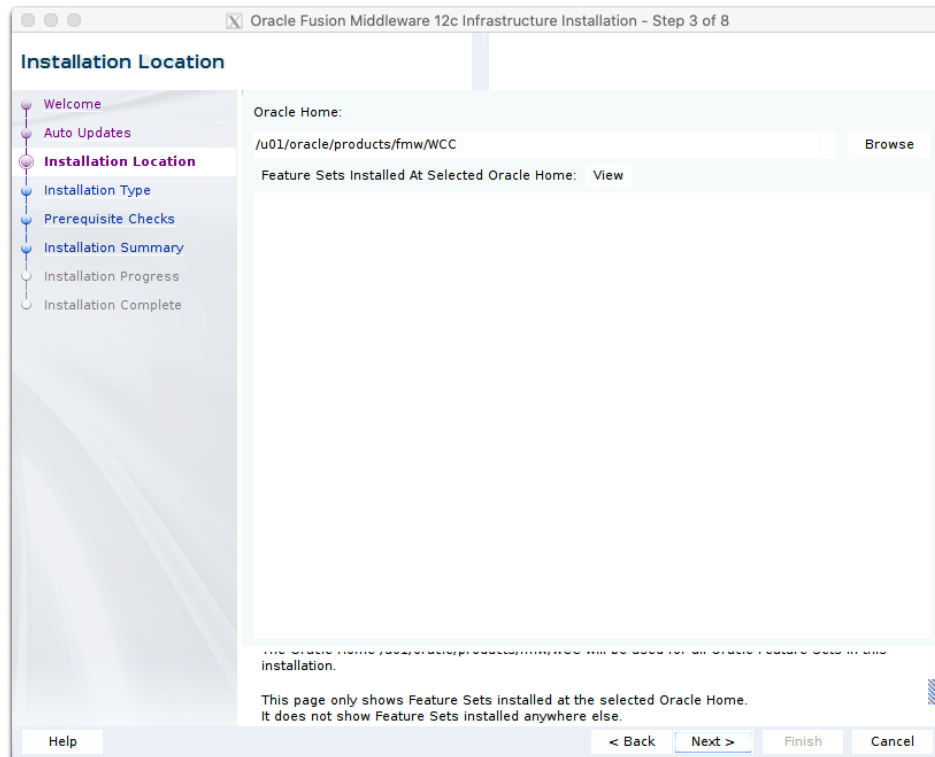

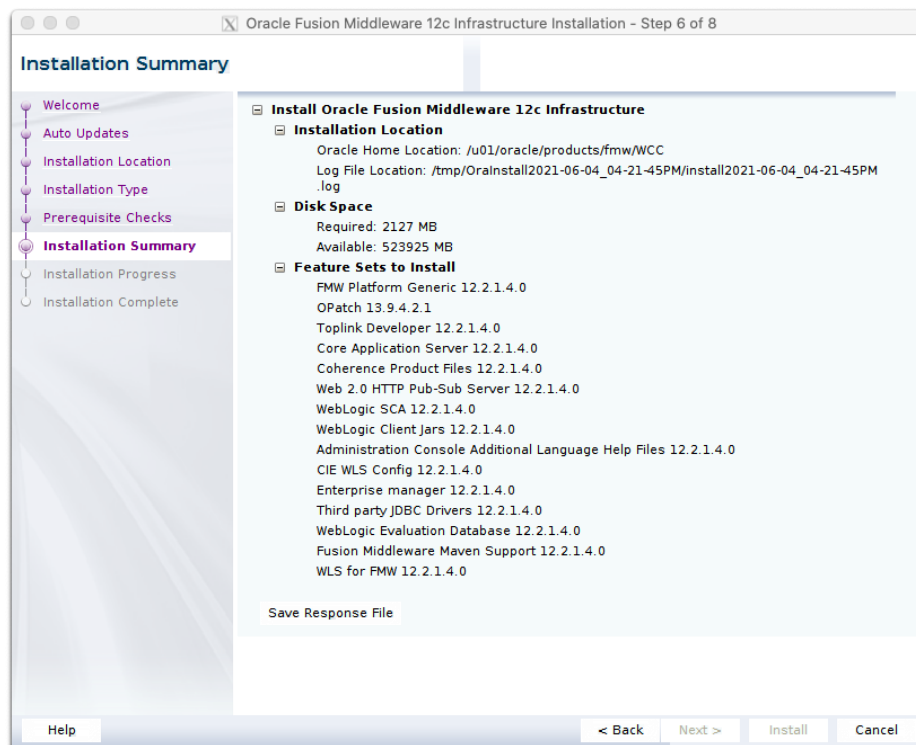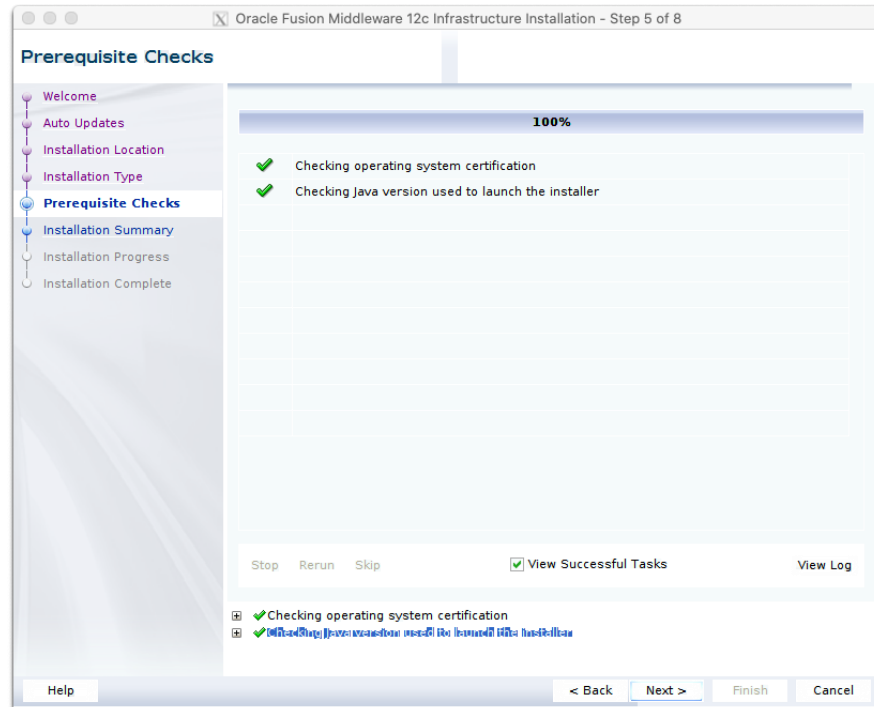

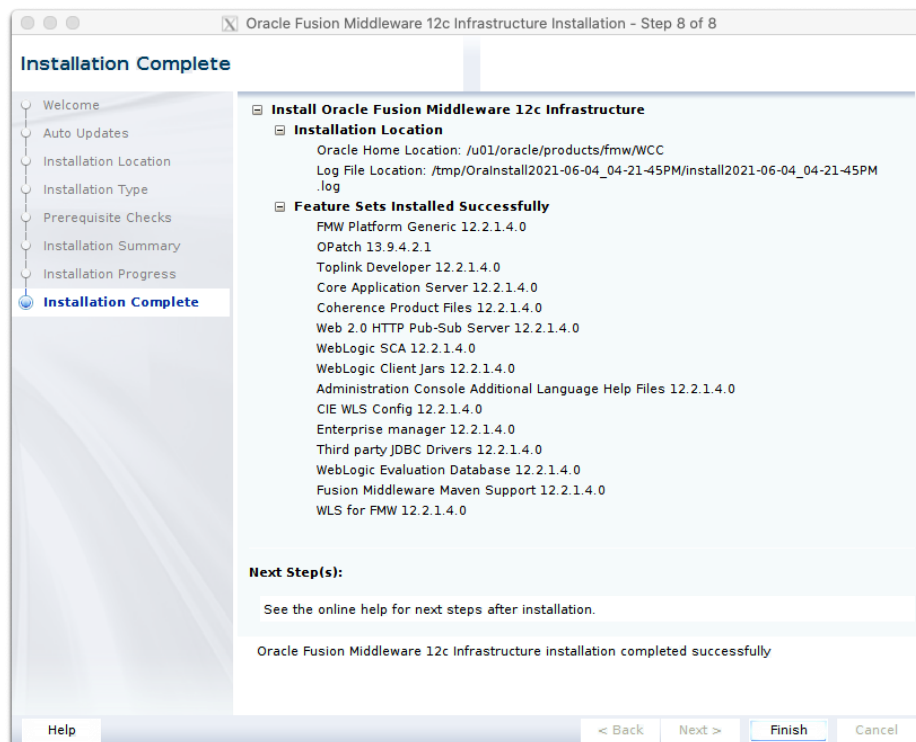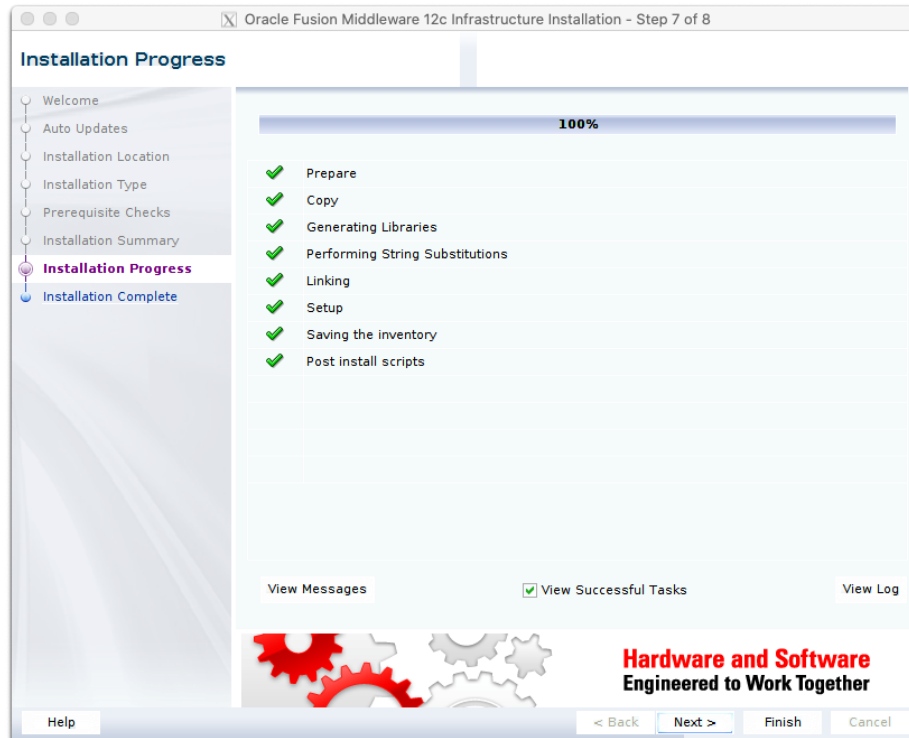

Instalación Oracle WebCenter Content:

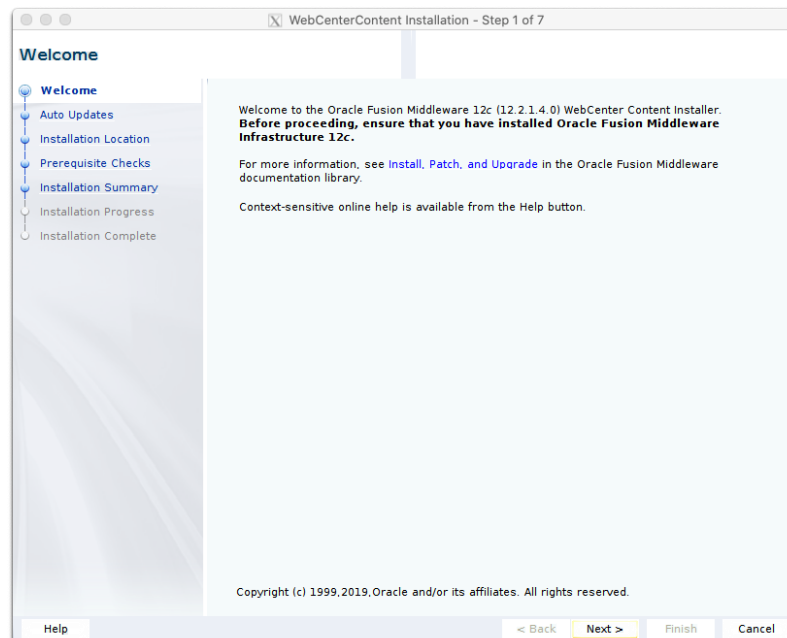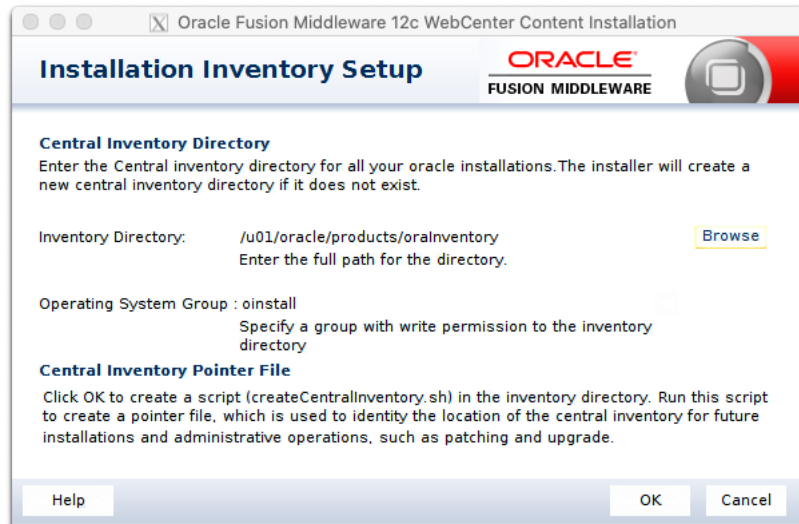

WebCenterContent Installation - Step 2 of 7

Auto Updates

Welcome

- Auto Updates**
- Installation Location
- Prerequisite Checks
- Installation Summary
- Installation Progress
- Installation Complete

☒ Skip Auto Updates

☐ Select patches from directory

Location:

☐ Search My Oracle Support for Updates

Username:

Password:

WebCenterContent Installation - Step 3 of 7

Installation Location

Welcome



- Auto Updates**
- Installation Location**
- Prerequisite Checks
- Installation Summary
- Installation Progress
- Installation Complete



Oracle Home:

Feature Sets Installed At Selected Oracle Home:


The Oracle Home /path/to/oracle/home/ will be used for all Oracle Feature Sets in this installation.

This page only shows Feature Sets installed at the selected Oracle Home. It does not show Feature Sets installed anywhere else.

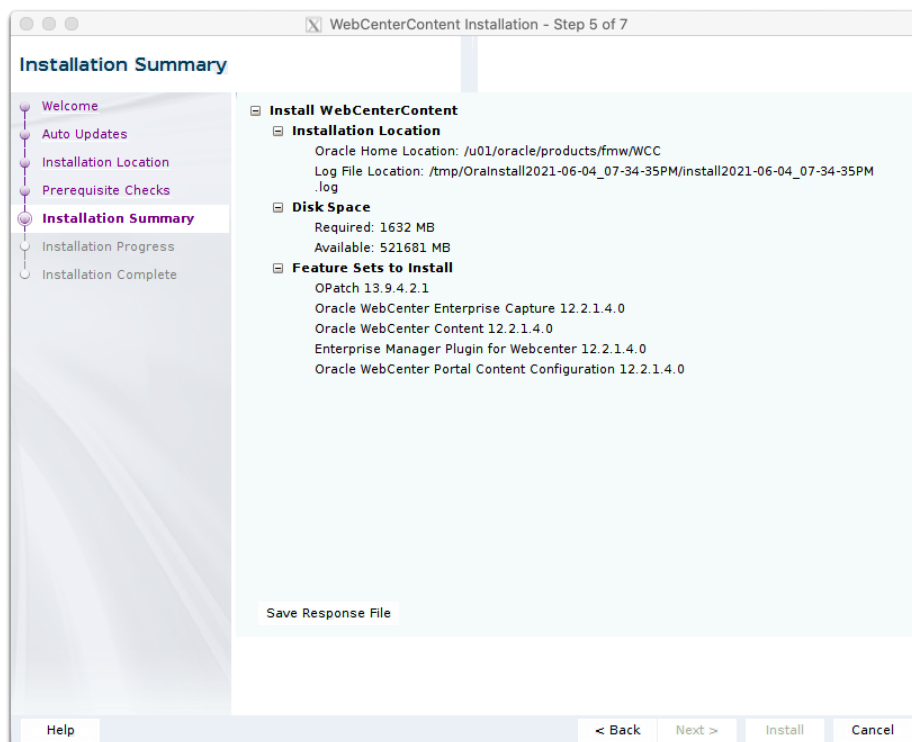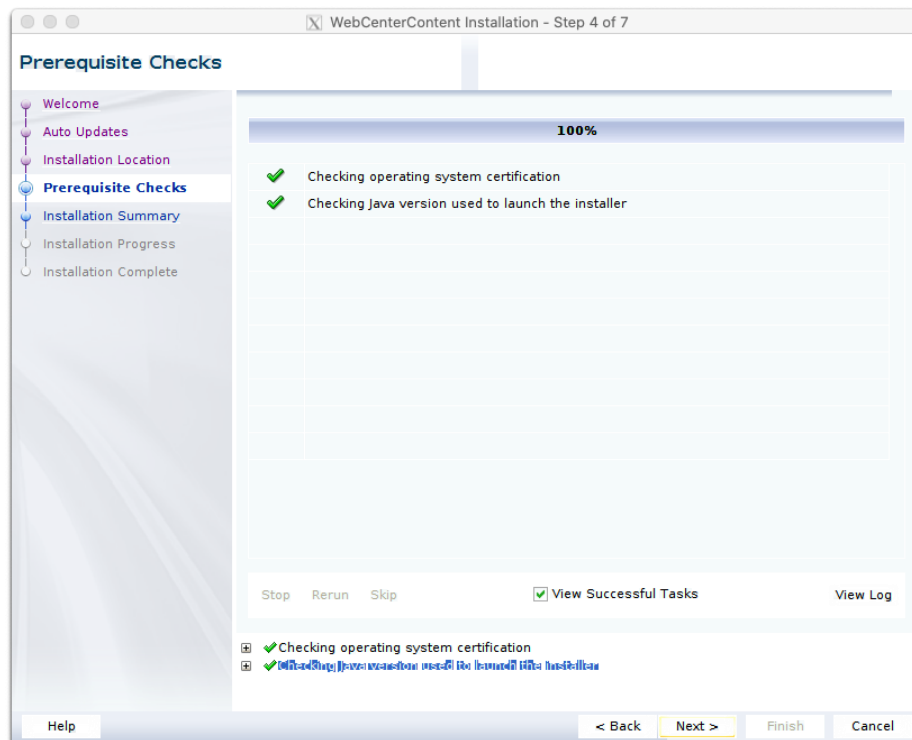

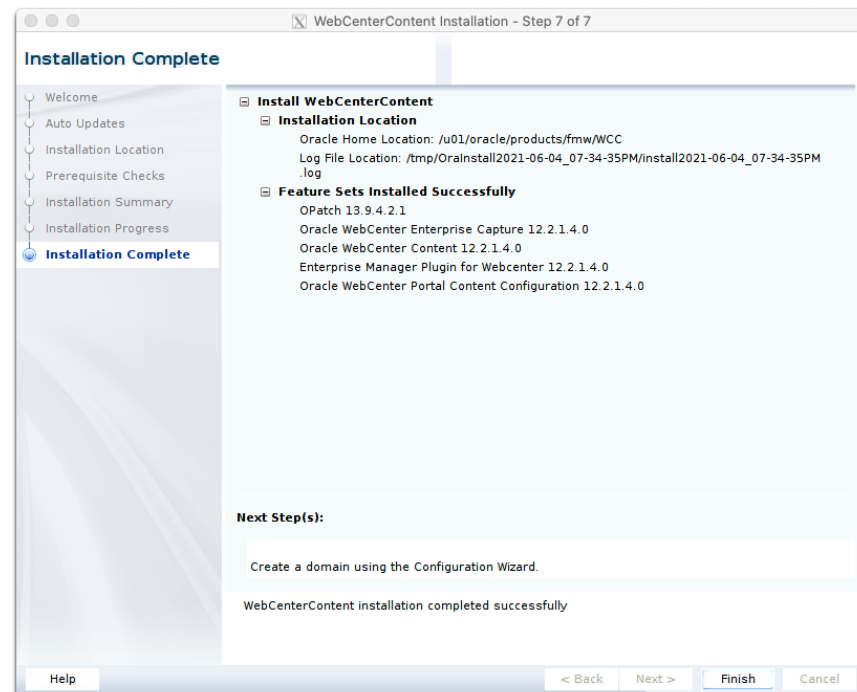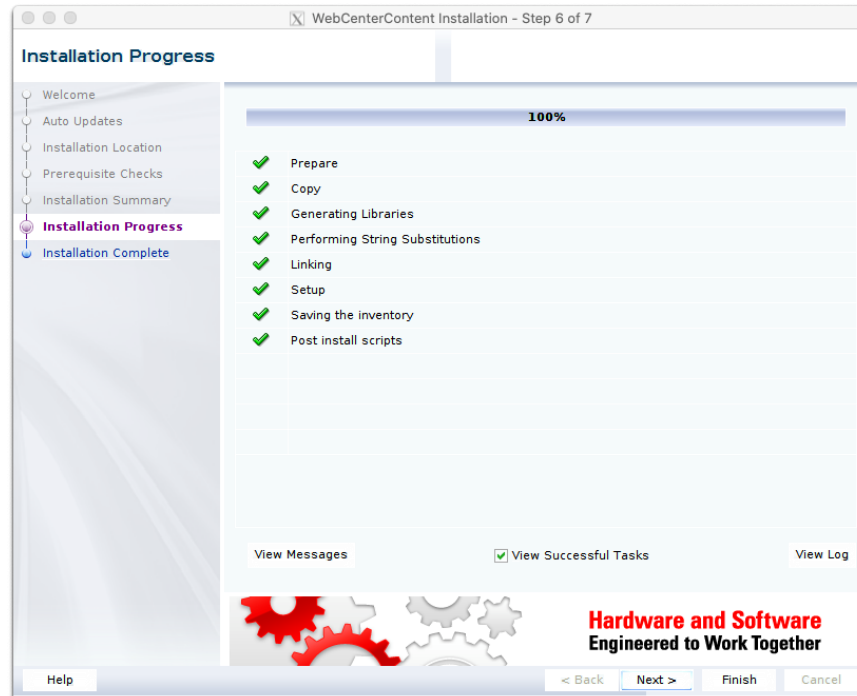

Instalación Oracle SOA Suite:

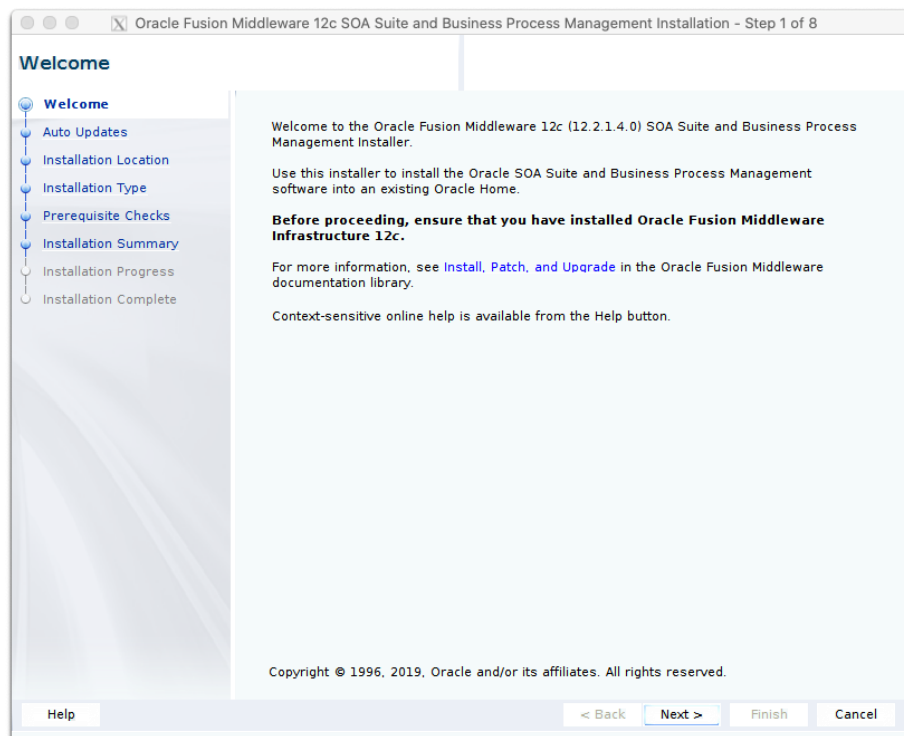

Oracle Fusion Middleware 12c SOA Suite and Business Process Management Installation - Step 2 of 8

Auto Updates

- Welcome
- Auto Updates**
- Installation Location
- Installation Type
- Prerequisite Checks
- Installation Summary
- Installation Progress
- Installation Complete

☒ Skip Auto Updates

☐ Select patches from directory

Location: [Browse](#)

☐ Search My Oracle Support for Updates

Username:

Password:

[Proxy Settings](#) [Test Connection](#)

Oracle Fusion Middleware 12c SOA Suite and Business Process Management Installation - Step 3 of 8

Installation Location



- Welcome
- Auto Updates
- Installation Location**
- Installation Type
- Prerequisite Checks
- Installation Summary
- Installation Progress
- Installation Complete



Oracle Home: [Browse](#)


Feature Sets Installed At Selected Oracle Home: [View](#)

The Oracle Home /u01/app/oracle/product/12.1.0/soa has no Oracle Feature Sets in this installation.

This page only shows Feature Sets installed at the selected Oracle Home. It does not show Feature Sets installed anywhere else.

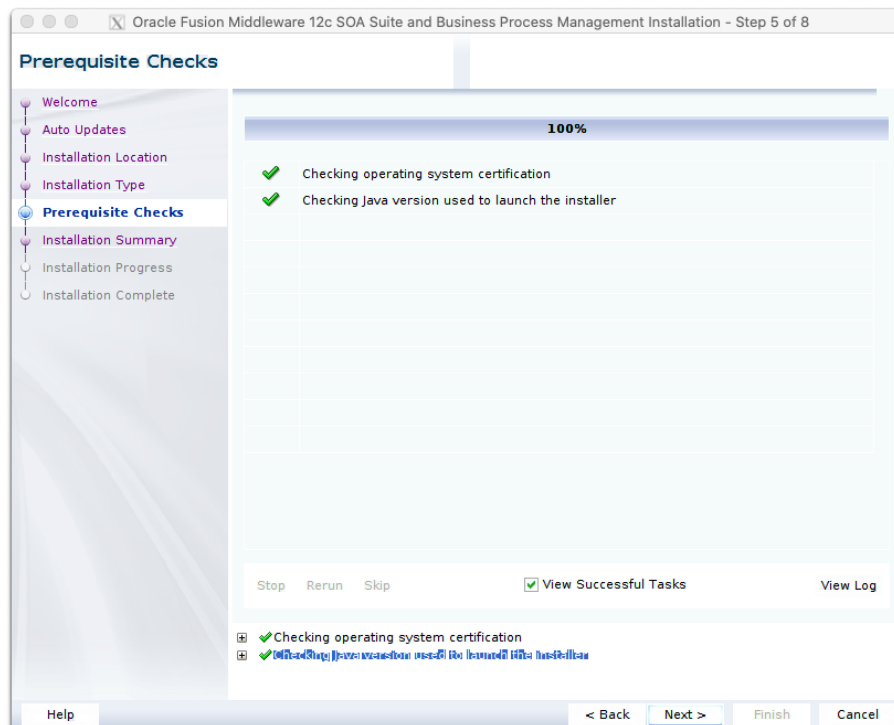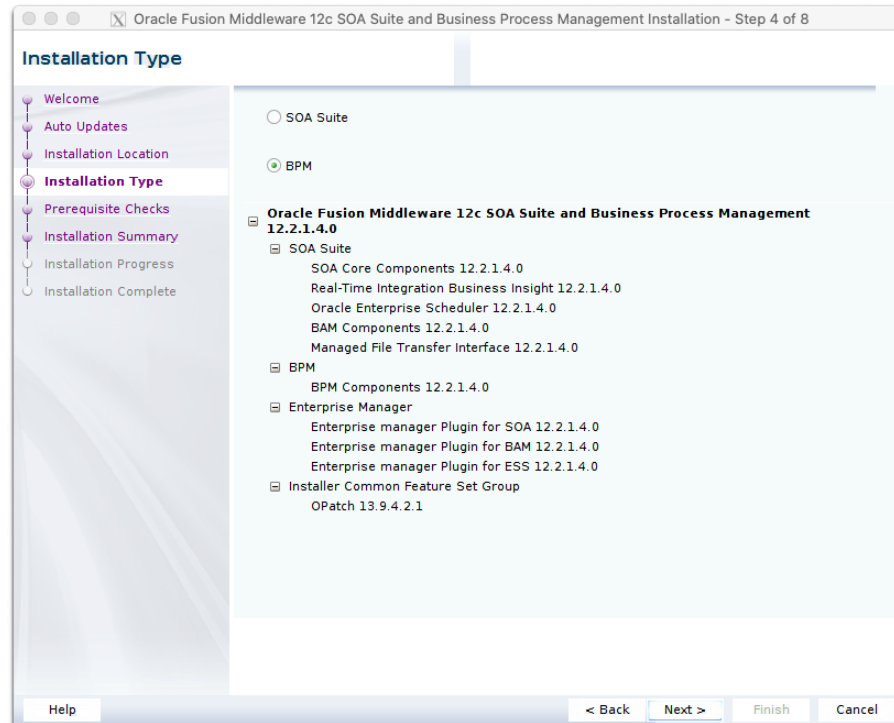


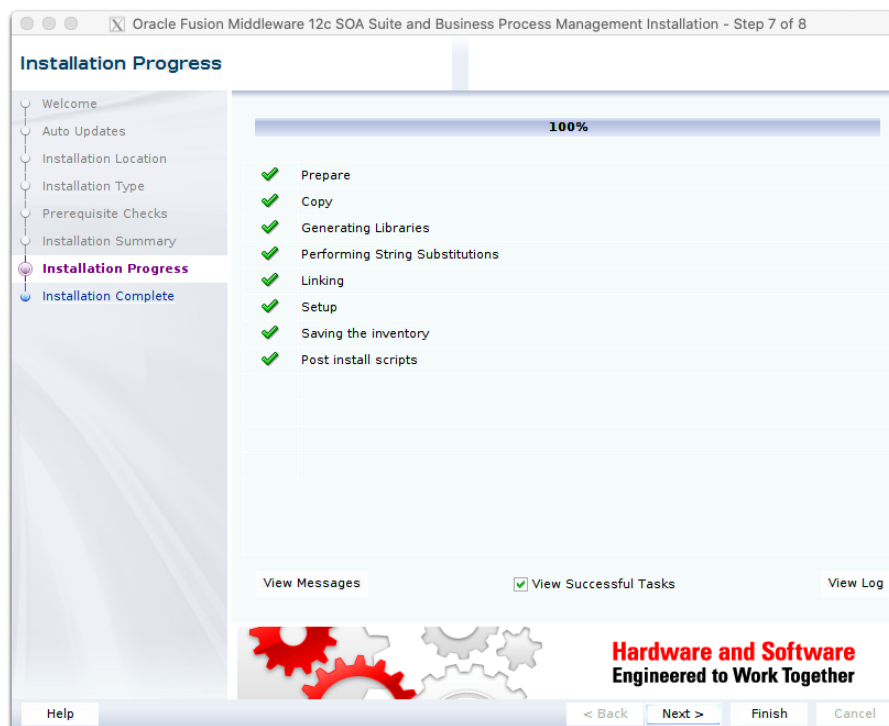
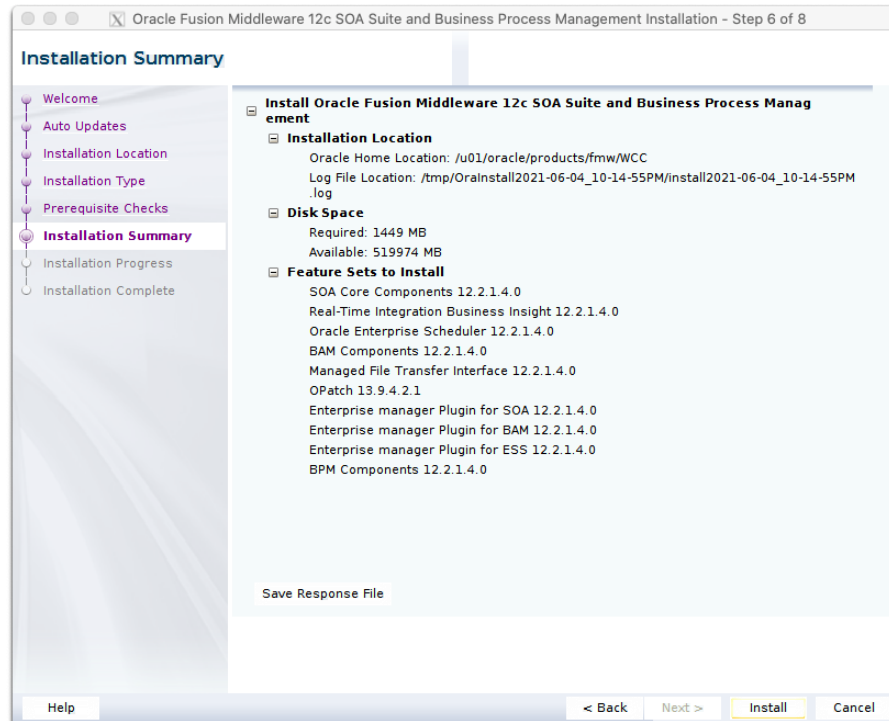



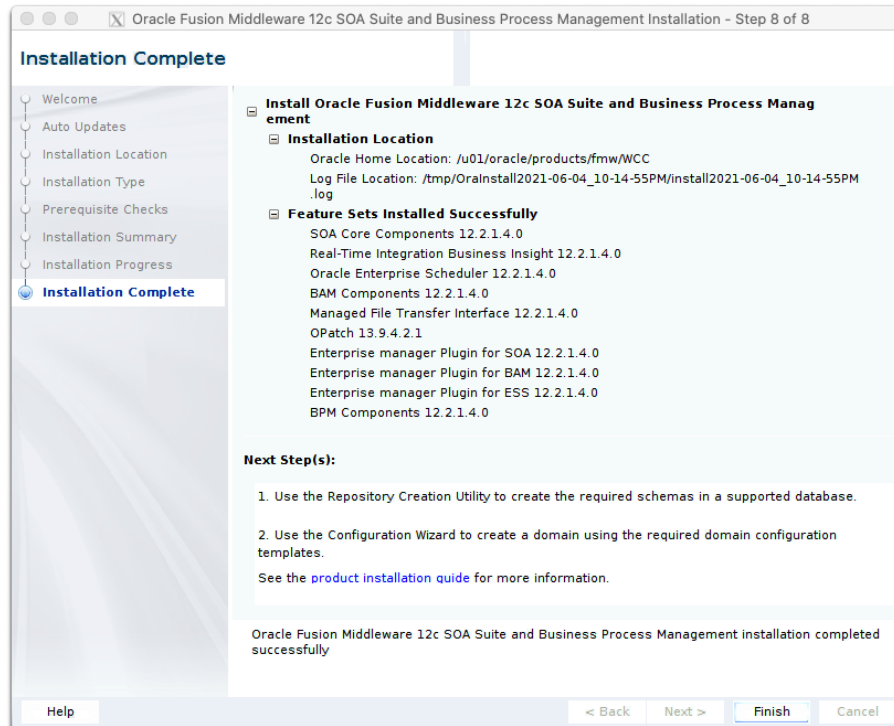




Instalación Oracle OHS:




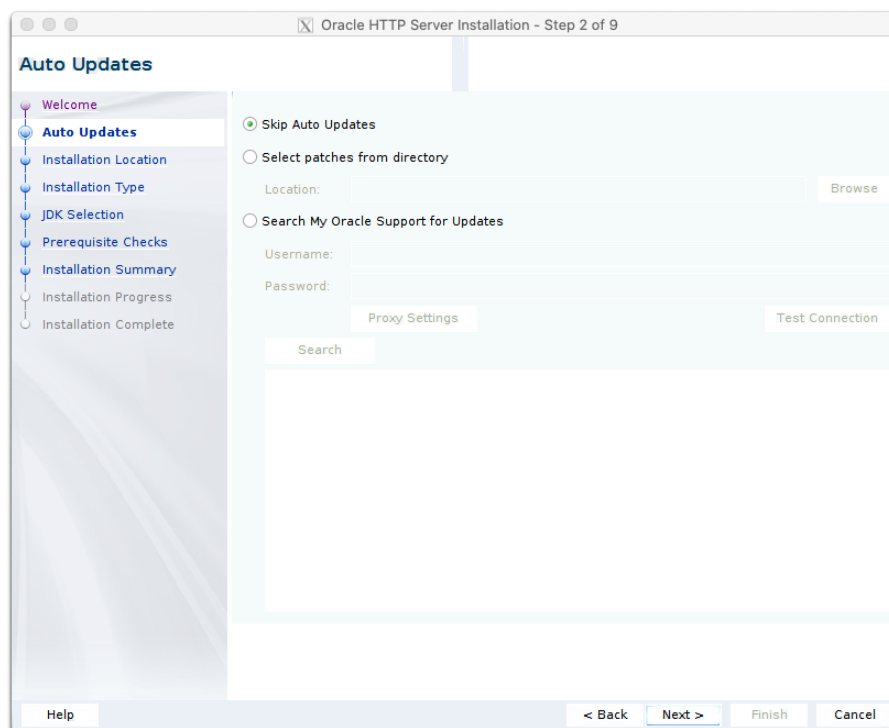


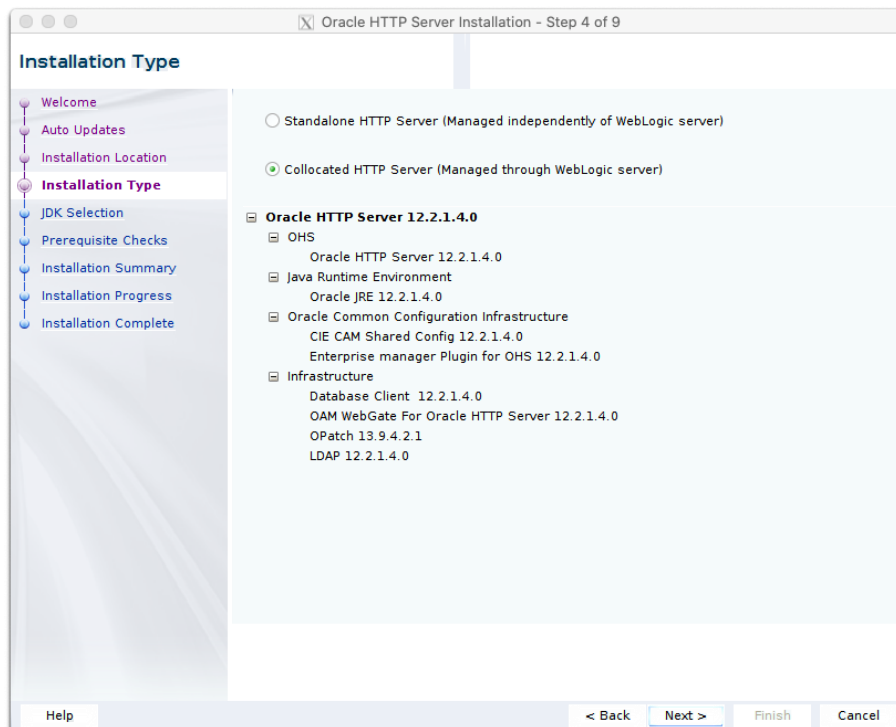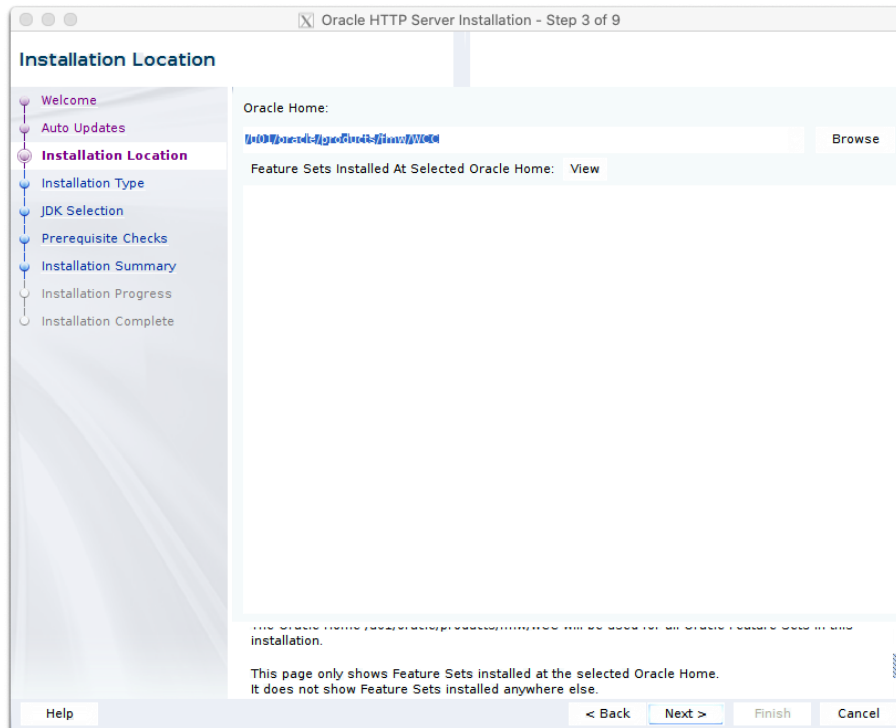

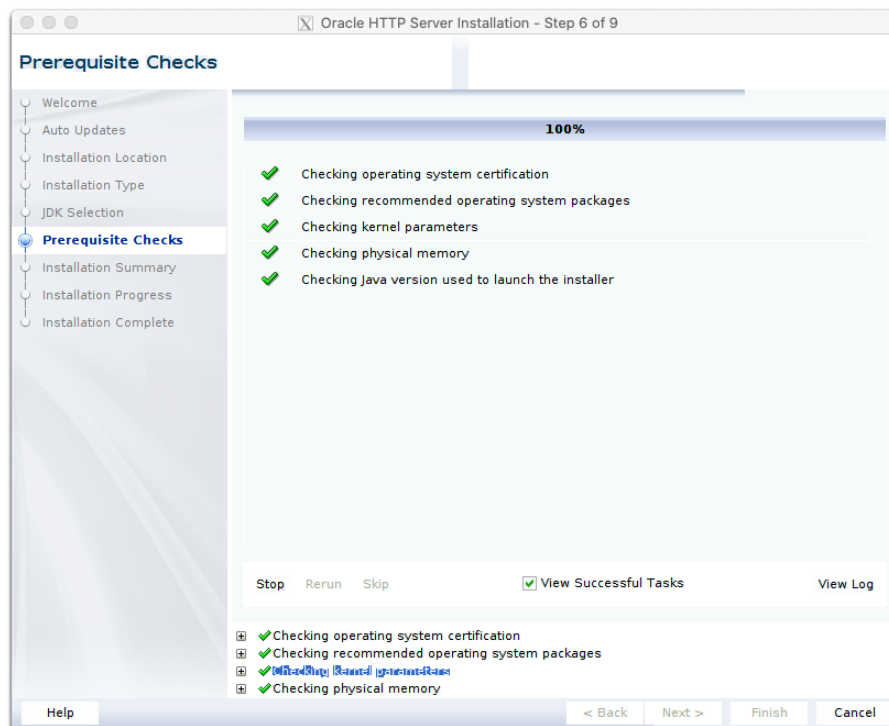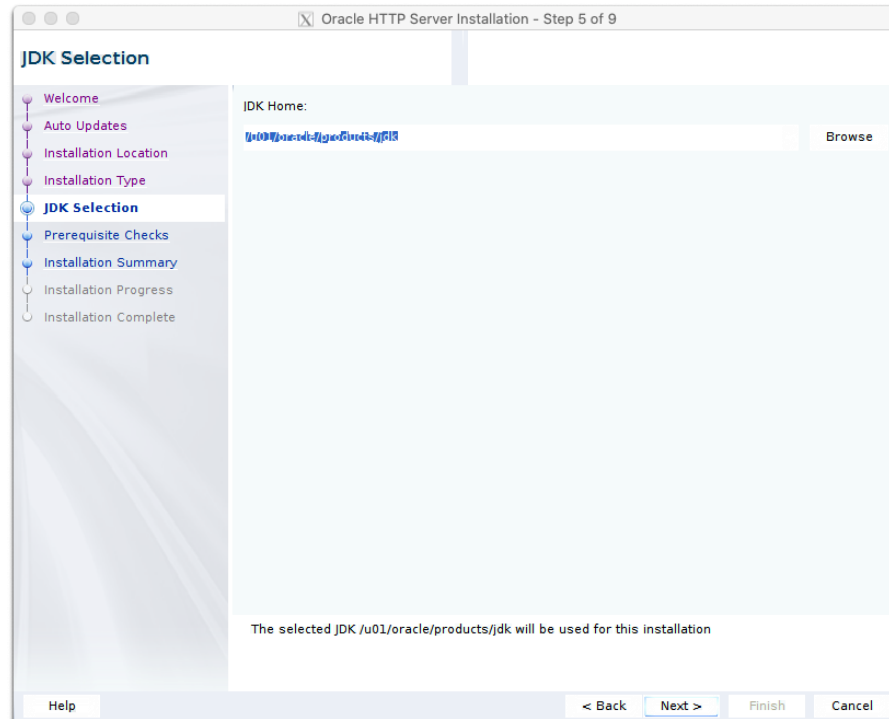

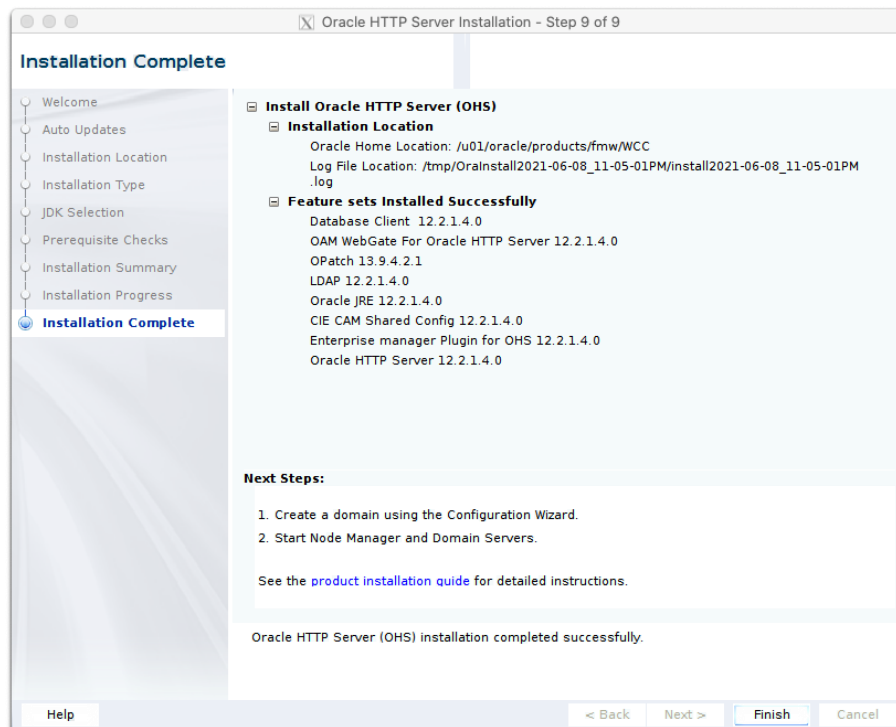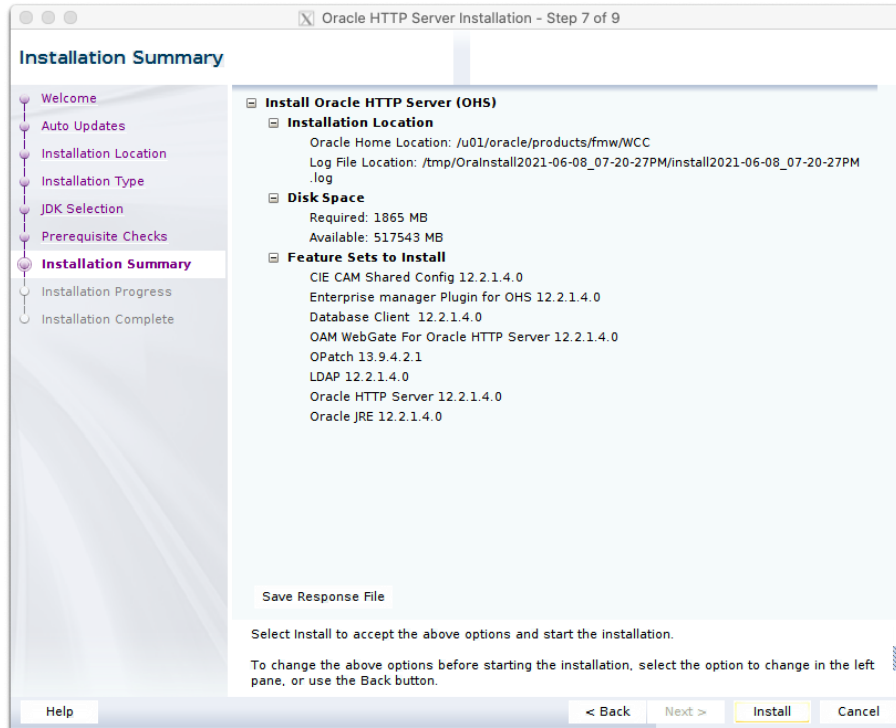

Ejecución RCU:

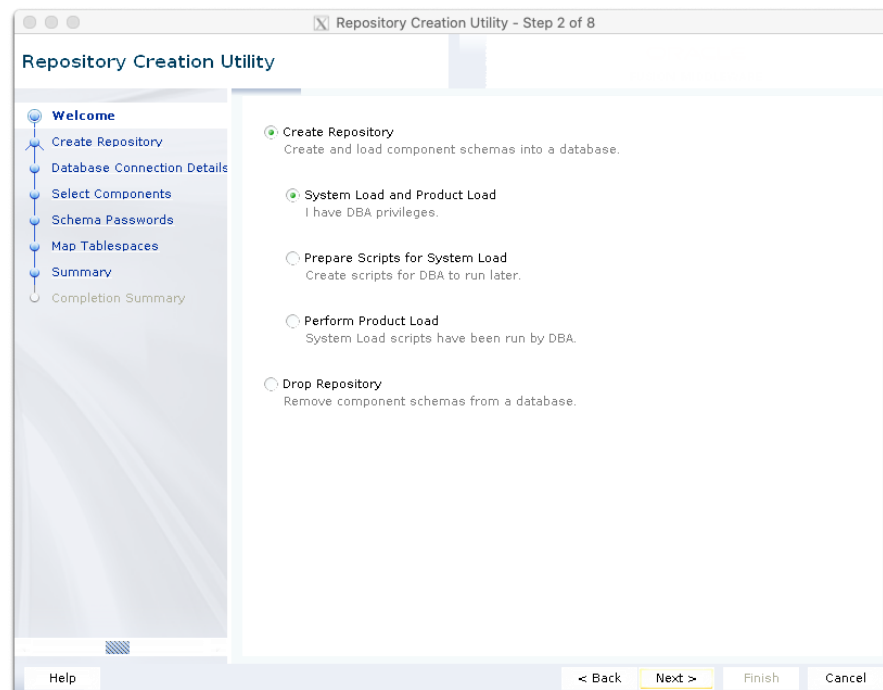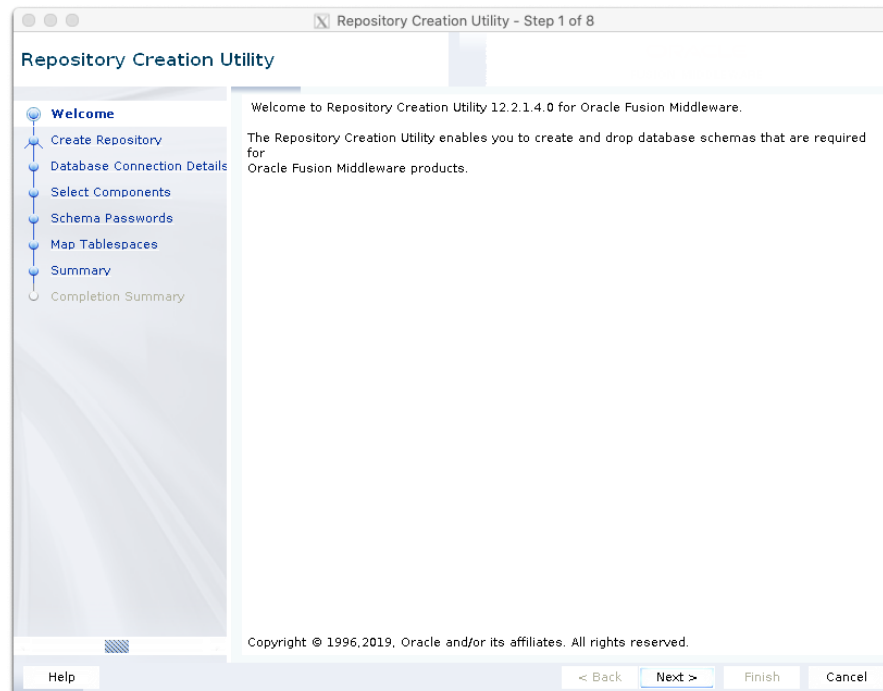

Repository Creation Utility - Step 3 of 8

Repository Creation Utility

Database Type: Oracle Database

Connection String Format: ☒ Connection Parameters ☐ Connection String

Connect String

Host Name: 10.160.4.48

Port: 1521

Service Name: wccinfra

Username: sys

Password:

Role: SYSDBA

Help < Back Next > Finish Cancel

Repository Creation Utility - Checking Prerequisites

Checking Global Prerequisites

- ✓ Initializing repository configuration metadata 00:06.620(sec)
- ✓ Obtain properties of the specified database 00:00.200(ms)
- ✓ Check requirement for specified database 00:01.904(sec)

Operation completed. Click OK to continue to next page.

OK

Repository Creation Utility - Step 4 of 8

Repository Creation Utility

Specify a unique prefix for all schemas created in this session, so you can easily locate, reference, and manage the schemas later.

☐ Select existing prefix



☒ Create new prefix: WCCQA

Alpha numeric only. Cannot start with a number. No special ...

Component	Schema Owner
☒ Common Infrastructure Services *	WCCQA_STB
☒ Oracle Enterprise Scheduler	WCCQA_ESS
☒ Oracle Platform Security Services	WCCQA_OPSS
☒ User Messaging Service	WCCQA_UMS
☒ Audit Services	WCCQA_IAU
☒ Audit Services Append	WCCQA_IAU_APPEND
☒ Audit Services Viewer	WCCQA_IAU_VIEWER
☒ Metadata Services	WCCQA_MDS
☒ Weblogic Services *	WCCQA_WLS
☒ SOA Suite	
☒ SOA Infrastructure	WCCQA_SOAINFRA
☒ WebCenter Content	
☒ Oracle WebCenter Content Imaging	WCCQA_IPM
☒ Oracle WebCenter Content Server - Search ...	WCCQA_OCSSEARCH
☒ Oracle WebCenter Content Server - Complete	WCCQA_OCS
☒ Oracle WebCenter Enterprise Capture	WCCQA_CAPTURE

* Mandatory component. Mandatory components cannot be deselected.

Help < Back Next > Finish Cancel

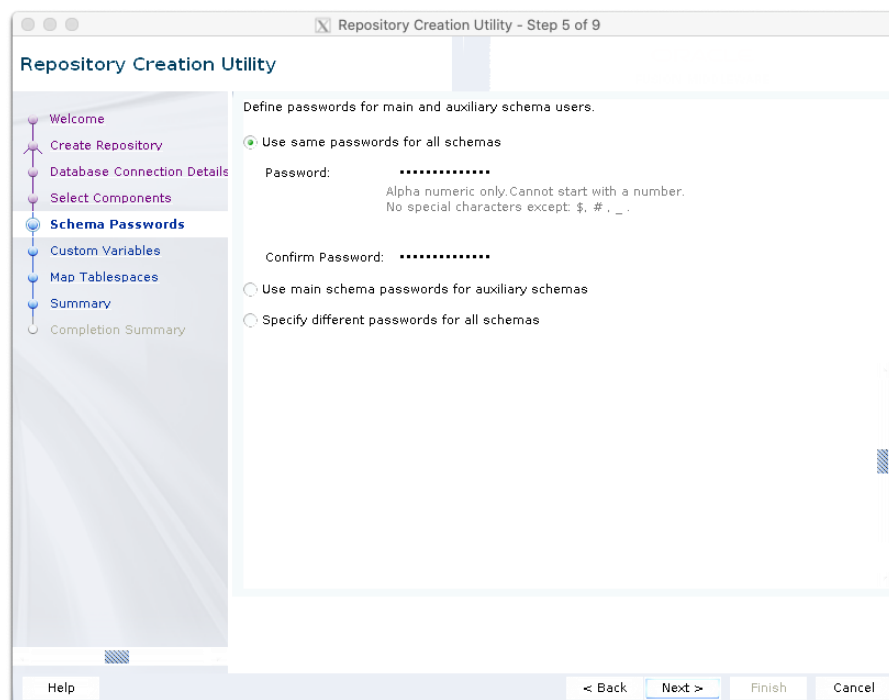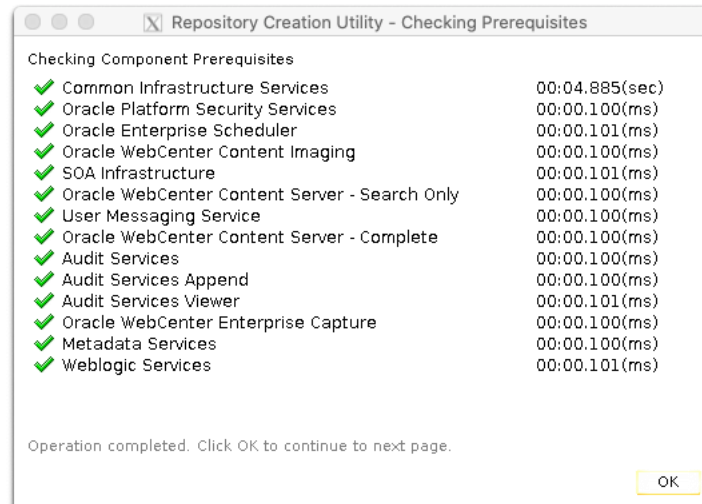

Repository Creation Utility - Step 6 of 9

Repository Creation Utility

Enter value for the following custom variables.

Component	Custom Variable	Medium	Value
SOA Infrastructure	Database Profile	Medium	
	Healthcare Integration	No	

Help < Back Next > Finish Cancel

Repository Creation Utility - Step 7 of 9

Repository Creation Utility

Default and temporary tablespaces for the selected components appear in the table below.
To create new tablespaces or modify existing tablespaces, use the Manage Tablespaces Button

Component	Schema Owner	Default Tablespace	Temp Tablespace
Common Infrastructu...	WCCQA_STB	*WCCQA_STB	*WCCQA_IAS_TEMP
Oracle Enterprise Sc...	WCCQA_ESS	*WCCQA_ESS	*WCCQA_IAS_TEMP
Oracle Platform Secu...	WCCQA_OPSS	*WCCQA_IAS_OPSS	*WCCQA_IAS_TEMP
Oracle WebCenter Co...	WCCQA_IPM	*WCCQA_IPM	*WCCQA_IPM_TEMP
SOA Infrastructure	WCCQA_SOAINFRA	*WCCQA_SOAINFRA	*WCCQA_IAS_TEMP
Oracle WebCenter Co...	WCCQA_OCSSEARCH	*WCCQA_OCSSEARCH	*WCCQA_OCSSEARCH...
User Messaging Serv...	WCCQA_UMS	*WCCQA_IAS_UMS	*WCCQA_IAS_TEMP
Oracle WebCenter Co...	WCCQA_OCS	*WCCQA_OCS	*WCCQA_OCS_TEMP
Audit Services	WCCQA_IAU	*WCCQA_IAU	*WCCQA_IAS_TEMP
Audit Services Append	WCCQA_IAU_APPEND	*WCCQA_IAU	*WCCQA_IAS_TEMP
Audit Services Viewer	WCCQA_IAU_VIEWER	*WCCQA_IAU	*WCCQA_IAS_TEMP
Oracle WebCenter En...	WCCQA_CAPTURE	*WCCQA_CAPTURE	*WCCQA_CAPTURE_TE...
Metadata Services	WCCQA_MDS	*WCCQA_MDS	*WCCQA_IAS_TEMP
Weblogic Services	WCCQA_WLS	*WCCQA_WLS	*WCCQA_IAS_TEMP

* Default tablespaces (specified in the configuration files) are to be created upon confirmation.




Help < Back Next > Finish Cancel


Repository Creation Utility - Confirmation

? Any tablespaces that do not already exist in the selected schemas will be created.


Click OK to create tablespaces.
Click Cancel to return to the wizard.


OK Cancel

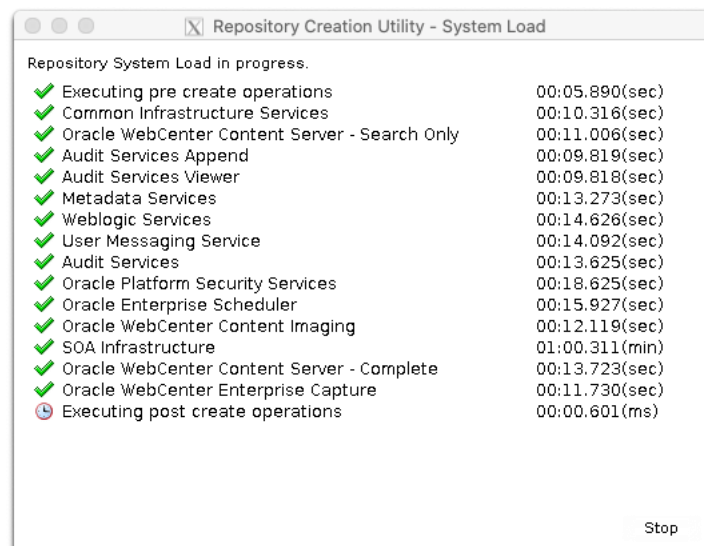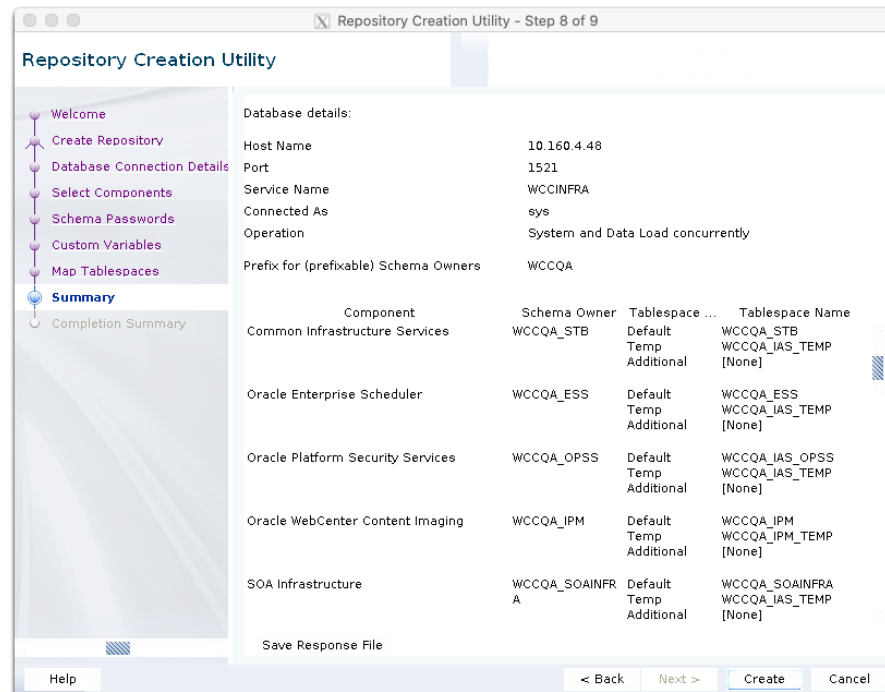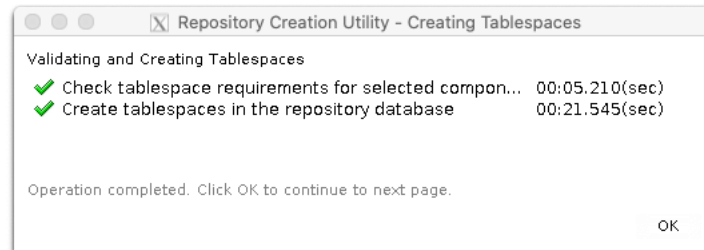

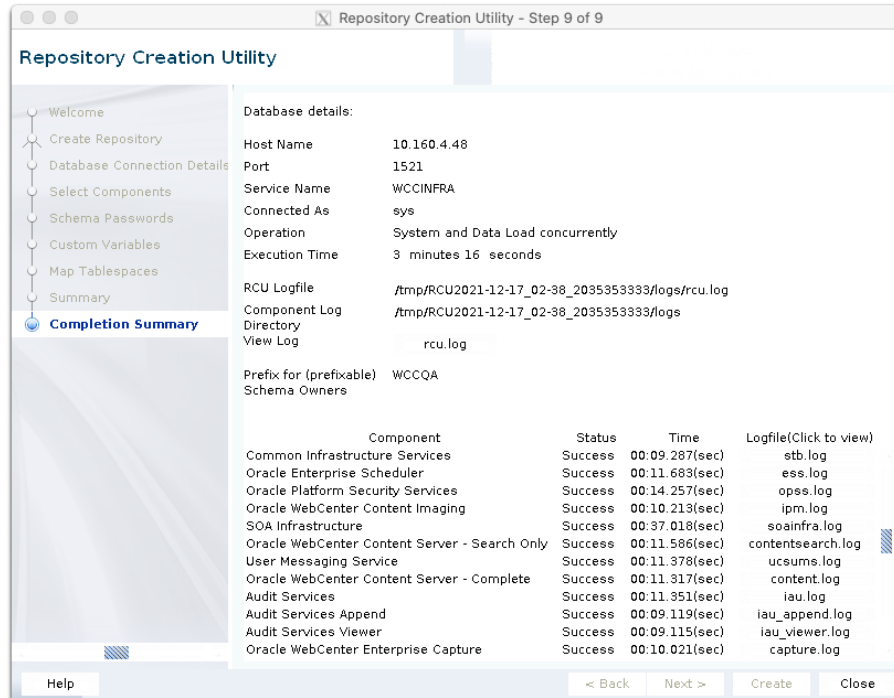

Creación de Dominio WLS:

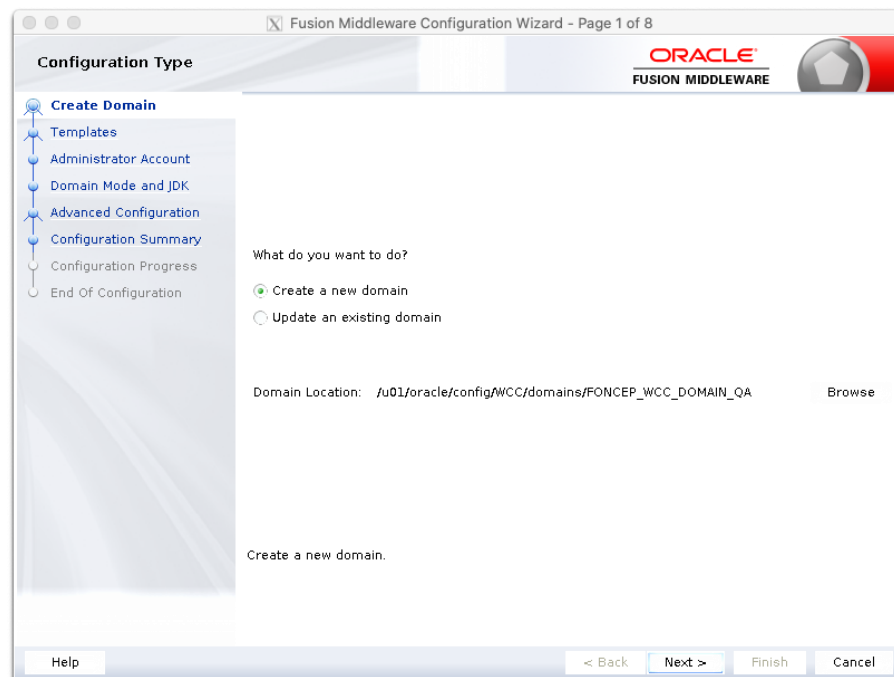

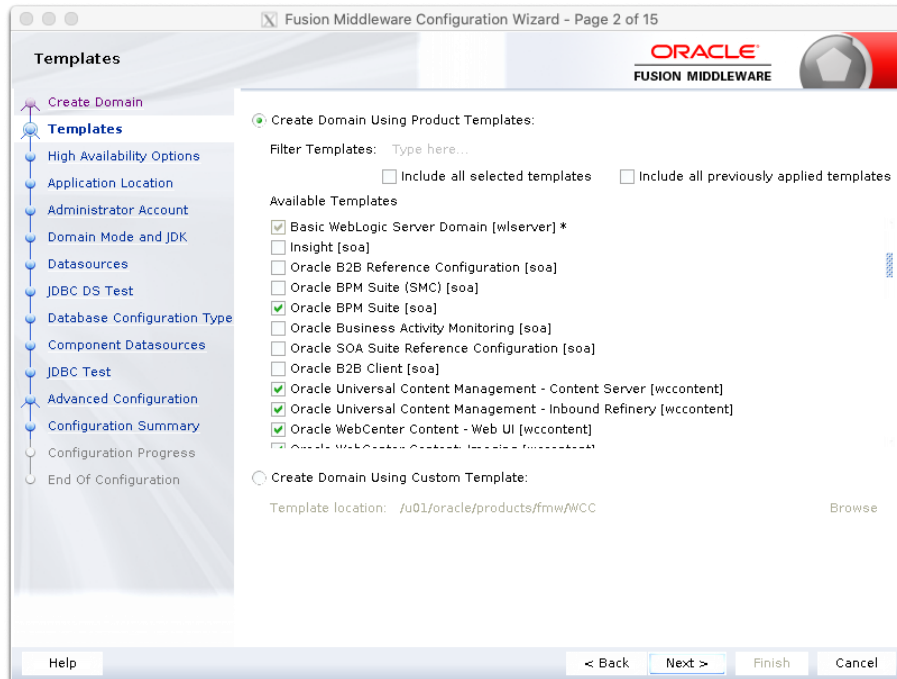

Fusion Middleware Configuration Wizard - Page 4 of 17

Application Location

Oracle
FUSION MIDDLEWARE

Create Domain
Templates
High Availability Options
Application Location
Administrator Account
Domain Mode and JDK
Datasources
JDBC DS Test
Database Configuration Type
Component Datasources
JDBC Test
Credentials
Keystore
Advanced Configuration
Configuration Summary
Configuration Progress
End Of Configuration

Domain name: FONCEP_WCC_DOMAIN_QA
Domain location: /u01/oracle/config/WCC/domains
Application location: /u01/oracle/config/WCC/domains/applications Browse

Help < Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 4 of 12

Administrator Account

Oracle
FUSION MIDDLEWARE

Create Domain
Templates
Application Location
Administrator Account
Domain Mode and JDK
Database Configuration Type
Component Datasources
JDBC Test
Advanced Configuration
Configuration Summary
Configuration Progress
End Of Configuration

Name weblogic
Password
Confirm Password

Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.

Help < Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 5 of 12

Domain Mode and JDK

Oracle
FUSION MIDDLEWARE

[Create Domain](#)
[Templates](#)
[Application Location](#)
[Administrator Account](#)
Domain Mode and JDK
[Database Configuration Type](#)
[Component Datasources](#)
[JDBC Test](#)
[Advanced Configuration](#)
[Configuration Summary](#)
[Configuration Progress](#)
[End Of Configuration](#)

Domain Mode

☐ Development
 Utilize boot properties for username and password, and poll for applications to deploy.

☒ Production
 Require the entry of a username and password, and do not poll for applications to deploy.

JDK

☒ Oracle HotSpot 1.8.0_291 /u01/oracle/products/jdk
☐ Other JDK Location: Browse

[Help](#)
[< Back](#)
[Next >](#)
[Finish](#)
[Cancel](#)

Fusion Middleware Configuration Wizard - Page 7 of 17

JDBC Data Sources

Oracle
FUSION MIDDLEWARE

[Create Domain](#)
[Templates](#)
[High Availability Options](#)
[Application Location](#)
[Administrator Account](#)
[Domain Mode and JDK](#)
Datasources
[JDBC DS Test](#)
[Database Configuration Type](#)
[Component Datasources](#)
[JDBC Test](#)
[Credentials](#)
[Keystore](#)
[Advanced Configuration](#)
[Configuration Summary](#)
[Configuration Progress](#)
[End Of Configuration](#)

Vendor: Oracle Driver: *Oracle's Driver (Thin) for Service connections; Ve

☒ Connection Parameters ☐ Connection URL String

Host Name: 10.160.4.48

DBMS/Service: wccinfra Port: 1521

Username: WCCQA_MDS Password:

Oracle RAC configuration for data sources:

☐ Convert to GridLink ☐ Convert to RAC multi data source ☐ Don't convert

Edits to the data above will affect all checked rows in the table below.

	Data Source	DBMS/Service	Host Name	Port	Username	Password
☒	mds-WCCUIMDSREPO	wccinfra	10.160.4.48	1521	WCCQA_MDS	

[Help](#)
[< Back](#)
[Next >](#)
[Finish](#)
[Cancel](#)

Fusion Middleware Configuration Wizard - Page 8 of 17

JDBC Data Sources Test

ORACLE FUSION MIDDLEWARE

- Create Domain
- Templates
- High Availability Options
- Application Location
- Administrator Account
- Domain Mode and JDK
- Datasources
- JDBC DS Test**
- Database Configuration Type
- Component Datasources
- JDBC Test
- Credentials
- Keystore
- Advanced Configuration
- Configuration Summary
- Configuration Progress
- End Of Configuration

Status	Data Source	JDBC Connection URL
✓	mds-WCCUIMDSREPO	jdbc:oracle:thin:@//10.160.4.48:1521/wccinfra

Test Selected Connections Cancel Testing

Connection Result Log

```
Data Source=mds-WCCUIMDSREPO
Driver=oracle.jdbc.OracleDriver
URL=jdbc:oracle:thin:@//10.160.4.48:1521/wccinfra
User=WCCQA_MDS
Password=*****
SQL Test=SELECT 1 FROM MDS_COMPONENTS
```

CFGFWK-64213: Test Successful!
CFGFWK-64213: JDBC connection test was successful.

Help < Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 9 of 17

Database Configuration Type

ORACLE FUSION MIDDLEWARE

- Create Domain
- Templates
- High Availability Options
- Application Location
- Administrator Account
- Domain Mode and JDK
- Datasources
- JDBC DS Test
- Database Configuration Type**
- Component Datasources
- JDBC Test
- Credentials
- Keystore
- Advanced Configuration
- Configuration Summary
- Configuration Progress
- End Of Configuration

Specify AutoConfiguration Options Using:

☒ RCU Data ☐ Manual Configuration

Enter the database connection details using the schema credentials corresponding to Common Infrastructure Services component in the Repository Creation Utility. The Wizard uses this connection to automatically configure the datasources required for components in this domain.

Vendor: Oracle Driver: *Oracle's Driver (Thin) for Service connections; ...

☒ Connection Parameters ☐ Connection URL String

Host Name: 10.160.4.48

DBMS/Service: wccinfra Port: 1521

Schema Owner: WCCQA_STB Schema Password: *****

Get RCU Configuration Cancel

Connection Result Log

Successfully Done.

Click "Next" button to continue.

Help < Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 10 of 17

JDBC Component Schema

Vendor: Driver:

☒ Connection Parameters ☐ Connection URL String

Host Name: DBMS/Service: Port: Schema Owner: Schema Password:

Oracle RAC configuration for component schemas:

☐ Convert to GridLink ☐ Convert to RAC multi data source ☐ Don't convert

Edits to the data above will affect all checked rows in the table below.

☐	Component Schema	DBMS/Service	Host Name	Port	Schema Ow...	Schema Pasw...
☐	UCM Schema	WCCINFRA	10.160.4.48	1521	WCCQA_OCS	
☐	SOA EDN (XA)	WCCINFRA	10.160.4.48	1521	WCCQA_SOAI	
☐	SOA EDN (Local)	WCCINFRA	10.160.4.48	1521	WCCQA_SOAI	
☐	IPM Schema	WCCINFRA	10.160.4.48	1521	WCCQA_IPM	
☐	LocalSvcTbl Schema	WCCINFRA	10.160.4.48	1521	WCCQA_STB	
☐	User Messaging Ser	WCCINFRA	10.160.4.48	1521	WCCQA_UMS	
☐	SOA (XA)	WCCINFRA	10.160.4.48	1521	WCCQA_SOAI	

Help < Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 11 of 17

JDBC Component Schema Test

☒ Status Component Schema JDBC Connection URL

☒	UCM Schema	jdbc:oracle:thin:@//10.160.4.48:1521/W
☒	SOA EDN (XA)	jdbc:oracle:thin:@//10.160.4.48:1521/W
☒	SOA EDN (Local)	jdbc:oracle:thin:@//10.160.4.48:1521/W
☒	IPM Schema	jdbc:oracle:thin:@//10.160.4.48:1521/W
☒	LocalSvcTbl Schema	jdbc:oracle:thin:@//10.160.4.48:1521/W
☒	User Messaging Service	jdbc:oracle:thin:@//10.160.4.48:1521/W
☒	SOA (XA)	jdbc:oracle:thin:@//10.160.4.48:1521/W
☒	SOA (Local)	jdbc:oracle:thin:@//10.160.4.48:1521/W
☒	WLS Schema	jdbc:oracle:thin:@//10.160.4.48:1521/W

Test Selected Connections Cancel Testing

Connection Result Log

Component Schema=UCM Schema
Driver=oracle.jdbc.OracleDriver
URL=jdbc:oracle:thin:@//10.160.4.48:1521/WCCINFRA
User=WCCQA_OCS
Password=*****
SQL Test=select 1 from schema_version_registry where owner=(select user from dual) and mr_type

CFGFWK-64213: Test Successful!
CFGFWK-64213: JDBC connection test was successful
999999

Help < Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 12 of 17

Credentials

ORACLE
FUSION MIDDLEWARE

[+ Add](#) [X Delete](#) [Discard Changes](#)

Key Name	Username	Password	Store Name
wccadfConnectUser	weblogic	*****	oracle.wcc.security

Navigation: Create Domain, Templates, High Availability Options, Application Location, Administrator Account, Domain Mode and JDK, Datasources, JDBC DS Test, Database Configuration Type, Component Datasources, JDBC Test, **Credentials**, Keystore, Advanced Configuration, Configuration Summary, Configuration Progress, End Of Configuration

[Help](#) [< Back](#) [Next >](#) [Finish](#) [Cancel](#)

Fusion Middleware Configuration Wizard - Page 13 of 17

Keystore

ORACLE
FUSION MIDDLEWARE

[Discard Changes](#)

Store Key Name: ums/apns

Alias	Trusted Certificate
Alias	

Alias	Private Key	Password	Identity Certificate

Navigation: Create Domain, Templates, High Availability Options, Application Location, Administrator Account, Domain Mode and JDK, Datasources, JDBC DS Test, Database Configuration Type, Component Datasources, JDBC Test, Credentials, **Keystore**, Advanced Configuration, Configuration Summary, Configuration Progress, End Of Configuration

[Help](#) [< Back](#) [Next >](#) [Finish](#) [Cancel](#)

Fusion Middleware Configuration Wizard - Page 14 of 26

Advanced Configuration

ORACLE
FUSION MIDDLEWARE

- Create Domain
- Templates
- High Availability Options
- Application Location
- Administrator Account
- Domain Mode and JDK
- Datasources
- JDBC DS Test
- Database Configuration Type
- Component Datasources
- JDBC Test
- Credentials
- Keystore
- Advanced Configuration**
- Administration Server
- Node Manager
- Managed Servers
- Clusters
- Server Templates
- Coherence Clusters
- Machines
- Help

☒ **Administration Server**
Modify Settings

☐ **File Store**
Modify Settings

☒ **Node Manager**
Configure Node Manager

☒ **Topology**
Add, Delete or Modify Settings for Managed Servers, Clusters, Virtual Targets and Coherence

☒ **System Components**
Configure and Target System Components

☐ **Domain Frontend Host Capture**
Configure Domain Frontend Host

☐ **Deployments and Services**
Target to Servers or Clusters

< Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 15 of 26

Administration Server

ORACLE
FUSION MIDDLEWARE

- Create Domain
- Templates
- High Availability Options
- Application Location
- Administrator Account
- Domain Mode and JDK
- Datasources
- JDBC DS Test
- Database Configuration Type
- Component Datasources
- JDBC Test
- Credentials
- Keystore
- Advanced Configuration
- Administration Server**
- Node Manager
- Managed Servers
- Clusters
- Server Templates
- Coherence Clusters
- Machines
- Help

Server Name

Listen Address All Local Addresses

Listen Port 7001

Enable SSL ☐

SSL Listen Port

Server Groups Unspecified

The name must not be null or empty and may not contain any : , = * ? % / _ cloned.

< Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 16 of 26

Node Manager

Node Manager Type

☐ Per Domain Default Location

☒ Per Domain Custom Location

Node Manager Home: /u01/oracle/config/nodemanager Browse

☐ Manual Node Manager Setup

Node Manager Credentials

Username: weblogic

Password:

Confirm Password:

Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.

< Back **Next >** Finish Cancel

Fusion Middleware Configuration Wizard - Page 17 of 26

Managed Servers

Managed Servers

+ Add 📄 Clone ✖ Delete 🔄 Discard Changes

Server Name	Listen Address	Listen Port	Enable SSL	SSL Listen Port	Server Groups
WCCADF_server1	All Local Address...	16225	☐	Disabled	UCM-ADF...
UCM_server1	All Local Address...	16200	☐	Disabled	UCM-MGD...
IBR_server1	All Local Address...	16250	☐	Disabled	IBR-MGD...
IPM_server1	All Local Address...	16000	☐	Disabled	IPM-MGD...
SOA_server1	All Local Address...	9103	☐	Disabled	SOA-MGD...
CUST_server1	All Local Address...	9105	☐	Disabled	Unspecified

< Back **Next >** Finish Cancel

Fusion Middleware Configuration Wizard - Page 21 of 27

Machines

Create Domain
Templates
High Availability Options
Application Location
Administrator Account
Domain Mode and JDK
Datasources
JDBC DS Test
Database Configuration Type
Component Datasources
JDBC Test
Credentials
Keystore
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Coherence Clusters
Machines
Help

Machine Unix Machine

+ Add X Delete Discard Changes

Name	Enable	Post Bind GID	Enable	Post Bind UID	Node Manager Listen Address	Node Manager
gestormdqa	☐	nobody	☐	nobody	gestormdqa	5556

< Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 22 of 27

Assign Servers to Machines

Create Domain
Templates
High Availability Options
Application Location
Administrator Account
Domain Mode and JDK
Datasources
JDBC DS Test
Database Configuration Type
Component Datasources
JDBC Test
Credentials
Keystore
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Coherence Clusters
Machines
Help

Servers

Machines

- UnixMachine
 - gestormdqa
 - AdminServer
 - CUST_server1
 - IBR_server1
 - IPM_server1
 - SOA_server1
 - UCM_server1
 - WCCADF_server1

Select **one or more** servers in the left pane and **one** machine in the right pane. Then use the right arrow button (>) to assign the server or servers to the machine.

< Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 25 of 29

System Components

+ Add -X Delete Discard Changes

System Component	Component Type	Restart Interval Seconds	Restart Delay Seconds
ohs1	OHS	3600	0

JDBC DS Test
Database Configuration Type
Component Datasources
JDBC Test
Credentials
Keystore
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
System Components
Assign System Component
Configuration Summary
Configuration Progress

Help < Back Next > Finish Cancel

Fusion Middleware Configuration Wizard - Page 26 of 30

OHS Server

JDBC DS Test
Database Configuration Type
Component Datasources
JDBC Test
Credentials
Keystore
Advanced Configuration
Administration Server
Node Manager
Managed Servers
Clusters
Server Templates
Coherence Clusters
Machines
Assign Servers to Machines
Virtual Targets
Partitions
System Components
OHS Server
Assign System Component
Configuration Summary
Configuration Progress

System Component ohs1

Admin Host 127.0.0.1

Admin Port 7779



Listen Address



Listen Port 7777

SSL Listen Port 4443

Server Name http://localhost:7777

Help < Back Next > Finish Cancel

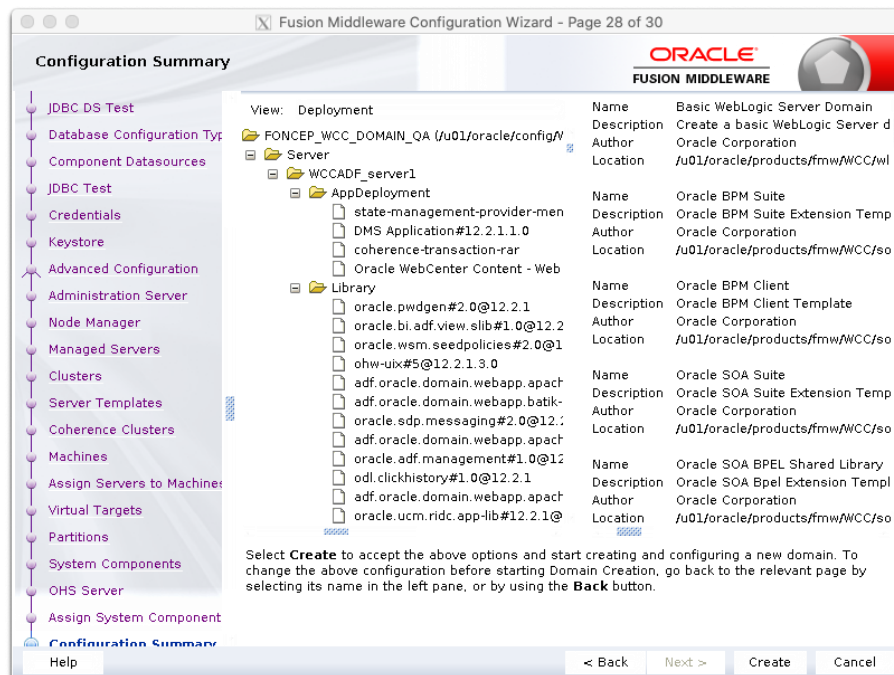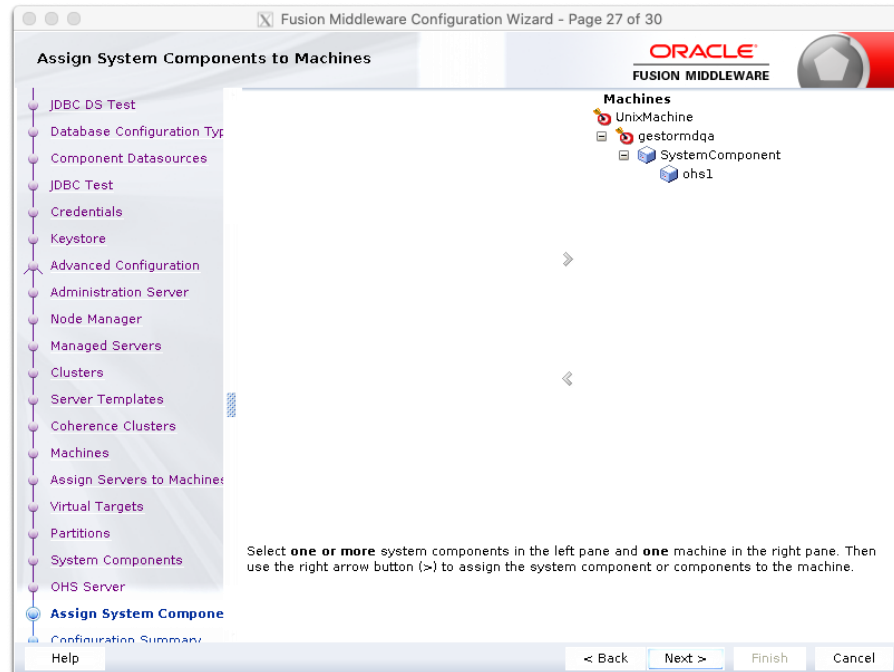

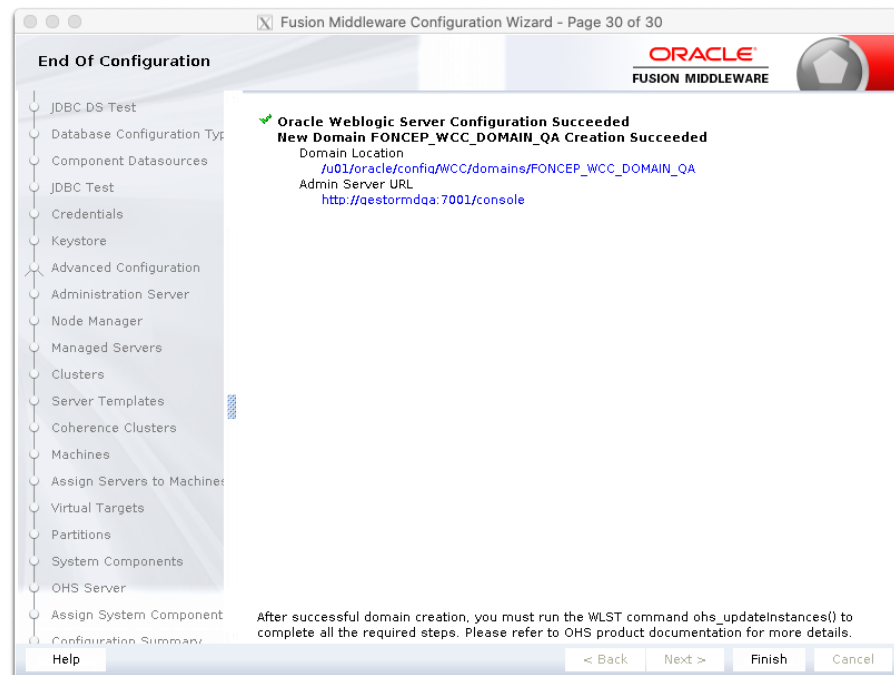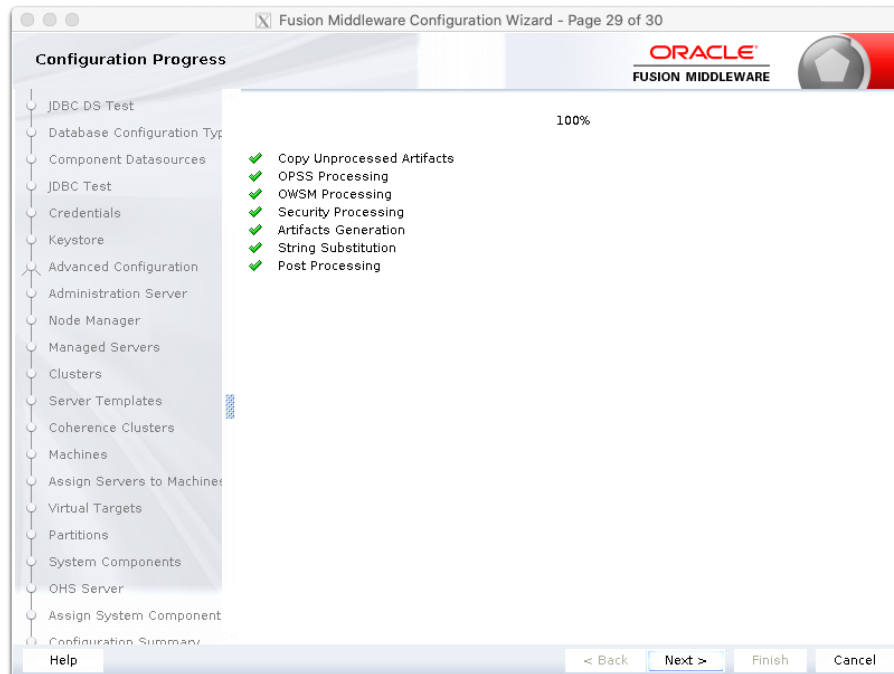

Consolas de Producto:

WebLogic Server - <http://gestormdqa:7001/console>

ORACLE WebLogic Server Administration Console 12c

Home Log Out Preferences Record Help

Welcome, weblogic Connected to: FONCEP_WCC_DOMAIN_QA

Home > Summary of Machines > gestormdqa > Summary of Servers

Summary of Servers

Configuration Control

A server is an instance of WebLogic Server that runs in its own Java Virtual Machine (JVM) and has its own configuration. This page summarizes each server that has been configured in the current WebLogic Server domain.

Customize this table

Servers (Filtered - More Columns Exist)

Click the **Lock & Edit** button in the Change Center to activate all the buttons on this page.

New Clone Delete Showing 1 to 7 of 7 Previous Next

Name	Type	Cluster	Machine	State	Health	Listen Port
AdminServer(admin)	Configured		gestormdqa	RUNNING	OK	7001
CUST_server1	Configured		gestormdqa	RUNNING	OK	9105
IBR_server1	Configured		gestormdqa	RUNNING	OK	16250
IPM_server1	Configured		gestormdqa	RUNNING	OK	16000
SOA_server1	Configured		gestormdqa	RUNNING	OK	9103
UCM_server1	Configured		gestormdqa	RUNNING	OK	16200
WCCADF_server1	Configured		gestormdqa	RUNNING	OK	16225

New Clone Delete Showing 1 to 7 of 7 Previous Next

How do I...
 • Create Managed Servers
 • Clone servers
 • Delete Managed Servers
 • Delete the Administration Server
 • Start and stop servers
 • View objects in the JNDI tree

System Status

Enterprise Manager Fusion Middleware Control- <http://gestormdqa:7001/em>

ORACLE Enterprise Manager Fusion Middleware Control 12c

WebLogic Domain weblogic

FONCEP_WCC_DOMAIN_QA

WebLogic Domain

Dec 17, 2021 4:36:17 AM GMT

Information

Certain functionality on this page is available only when you own the edit session lock. To obtain the lock, click "Lock and Edit" in the Change Center menu.

Servers

7 Up

Clusters

0 Clusters

Deployments

6 Down
25 Up

Administration Server

Name AdminServer
 Host gestormdqa.segqa.segdmz.oraclevcn.com
 Listen Port 7001

Servers

View Create Delete Control

Name	Status	Cluster	Machine	State	Health	Listen Port	C Usage
AdminServer(admin)	Running		gestormdqa	Running	OK	7001	0
CUST_server1	Running		gestormdqa	Running	OK	9105	Unavail
IBR_server1	Running		gestormdqa	Running	OK	16250	0
IPM_server1	Running		gestormdqa	Running	OK	16000	0
SOA_server1	Running		gestormdqa	Running	OK	9103	0

Columns Hidden 34 Servers 7 of 7

WebCenter Content - <http://gestormdqa:16200/cs>

WebCenter Content Configuration

Node Information

Cluster Node Identifier:  UCM_server1

*** Content Server Instance Folder:**  /u01/oracle/config/WCC/domains/FONCEP_WCC_

*** Native File Repository Location:**  /u01/oracle/config/WCC/domains/FONCEP_WCC_

*** Weblayout Folder:**  /u01/oracle/config/WCC/domains/FONCEP_WCC_

*** User Profile Folder:**  /u01/oracle/config/WCC/domains/FONCEP_WCC_

Content Server URL Prefix:  /cs/

Instance Information

Is New Content Server Instance:  ☒

Server Socket Port:  4444

Incoming Socket Connection Address Security Filter:  127.0.0.1|10.160.4.149|0:0:0:0:0:0:1

*** Web Server HTTP/HTTPS Address:**  gestormdqa.segqa.segdmz.oraclevcn.com:1620

Web Address Is HTTPS:  ☐

Company Mail Server:  mail

Administrator E-Mail Address:  sysadmin@example.com

*** Server Instance Name:**  gestormdqa_4444

*** Server Instance Label:**  gestormdqa_4444

*** Server Instance Description:**  Instance gestormdqa_4444

Is Auto Number Enabled:  ☒

Auto Number Prefix:  gestormdqa_444

SOA Suite - <http://gestormdqa:9103/soa-infra>

Welcome to the Oracle SOA/BPM Platform on WebLogic

SOA Version: v12.2.1.4.0 - MAIN_190828.0353.3300
WebLogic Server 12.2.1.4.0 (12.2.1.4.0)
Running on: SOA_server1

The following composites are currently deployed:

1. default/SimpleApproval!1.0*soa_6c7ecaaf-81ee-497b-81c9-29d8d0f320b9
 - [Test client](#)

Links

[SOA Composer](#)
[BPM Worklist](#)
[Business Process Composer](#)
[Business Process Workspace](#)
[B2B Console](#)

Oracle BPM - <http://gestormdqa:9103/integration/worklistapp>

Views + ✎ ✕

Actions ▾

Status ▾ **Title** 🔍

Me & My Group All ▾ **Assigned** ▾

Number **Creator** **Assigned** **Priority**

Inbox

My Tasks (0)

Initiated Tasks

Administrative Tasks

Views

Due Soon

High Priority

Past Day

Past Week

Past Month

Past Quarter

New Tasks

No data to display

Please select a task to see the details

User Communication Preference - <http://gestormdqa:9103/sdpmessaging/userprefs-ui>

ORACLE User Communication Preferences

< Home Help Settings Logout > weblogic

Available Channels

View ▾

Name	Type	Address	Default
No data to display			

Messaging Filters

View ▾

Name	Description	Enabled
No data to display		

SOA Composer - <http://gestormdqa:9103/soa/composer/>

ORACLE SOA Composer

Links ▾ weblogic

Create Session

Deployment View ▾

- SOA Infra
 - Composites
 - Metadata
 - CaseManagementBaseDictionary
 - DynamicRouting.rules

WebServices Manager - <http://gestormdqa:9103/wsm-pm/>

[Validate Policy Manager](#)

Copyright © 2007, 2019, Oracle and/or its affiliates. All rights reserved.
Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Inbound Refinery - <http://gestormdqa:16250/ibr>

Inbound Refinery Configuration

Instance Information

Inbound Refinery Instance Identifier:	IBR_server1
* Inbound Refinery Instance Folder:	/u01/oracle/config/WCC/domains/FONCEP_WCC_
* Native File Repository Location:	/u01/oracle/config/WCC/domains/FONCEP_WCC_
* Weblayout Folder:	/u01/oracle/config/WCC/domains/FONCEP_WCC_
* User Profile Folder:	/u01/oracle/config/WCC/domains/FONCEP_WCC_
Register Start Menu Actions:	☒
* Server Socket Port:	5555
Incoming Socket Connection Address Security Filter:	127.0.0.1 0:0:0:0:0:0:1
* Web Server HTTP/HTTPS Address:	gestormdqa.segqa.segdmz.oraclevcn.com:1625
Web Address Is HTTPS:	☐
Inbound Refinery URL Prefix:	/ibr/
* Server Instance Name:	gestormdqa379250cncom16250
* Server Instance Label:	gestormdqa379250cncom16250
* Server Instance Description:	Instance gestormdqa379250cncom16250

*** - Required**

Oracle Colombia,
Calle 100 No. 13 - 21 Piso 15
Bogotá, Colombia

Phone: +57 1 611 96 00
Fax: +57 1 611 96 00



Hardware and Software, Engineered to Work Together

CONNECT WITH US



Copyright © 2014, Oracle and/or its affiliates. All rights reserved. This document is provided for information purposes only, and the contents hereof are subject to change without notice. This document is not warranted to be error-free, nor subject to any other warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document. This document may not be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without our prior written permission.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group. 0715